

#### **FEATURES & SPECIFICATIONS**

#### **INTENDED USE**

The BKA is a specification grade wall mount for the bath, stairwells, office, and "over the bed" applications, and is distinguished by excellent lighting distribution and craftsmanship. The angled front plane provides aesthetic appeal.

#### SIZE

W x L x H in inches (mm) 3.25H x 5.50W (85 x 140)

Available in 24, 36, and 48in (610, 915, 1220) lengths

#### **MOUNTING**

Direct wall mount.

#### **MATERIALS & FEATURES**

Housing is die-formed and embossed code 22 gage steel. Standard finish is high reflectance baked white enamel; chrome ends or full chrome body are available as an option. Wiring knockouts are provided on back of housing. Lens is fully captured by end plate. End cap held in place with acorn nut.

- Standard high reflectance white finish with smooth white lens
- Chrome body, or chrome ends only finishes available.
- · Options include prismatic lens, special ballasts, pull chain switches, and convenience outlets.

## **BKA Series**

LED Wall Mount, Angled Front



#### **TYPICAL OPTIONS AND ACCESSORIES**


Custom finishes, pull chains, convenience outlets, and Emergency ballasts. See options page at the end of the T02WallF section, or contact factory for more details



Example: BKAMW24LS24W2250LDMV40KCHEND

#### ORDERING INFORMATION


#### **STANDARD**

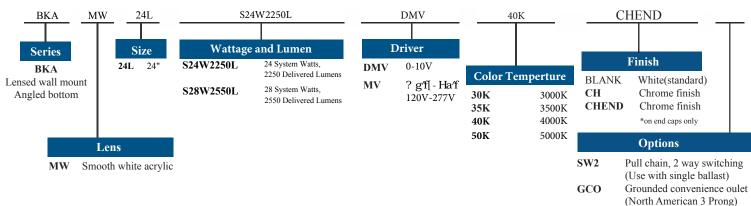

### \*SW2 and GCO options available for 120V models only.

American 3 Prong)
\*SW2 and GCO options available for 120V models only.

#### **HIGH OUTPUT**

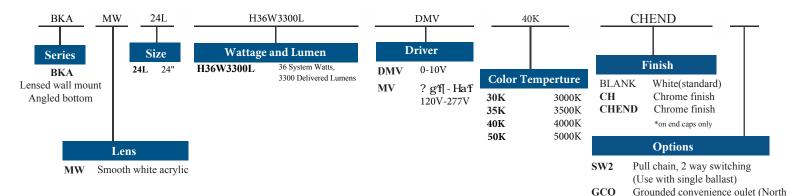

#### \*Consult for more options

Texas Fluorescents 2055 Luna Rd. Suite 142 Carrollton, TX 75006 Phone: 972-247-3171 Fax: 972-247-0200

www.texasfluorescents.com emaiil: sales@texasfluorescents.com

Catalog Number:
Notes:




## **BKA Series** LED Wall Mount, Angled Front





Example: BKAMW48LS48W4500LDMV40KCHEND

ORDERING INFORMATION

#### **STANDARD**

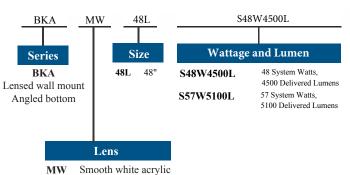






**Options** Pull chain, 2 way switching SW2 (Use with single ballast)


\*on end caps only

**GCO** Grounded convenience oulet (North American 3 Prong)

\*SW2 and GCO options available for 120V models only.

#### **HIGH OUTPUT**

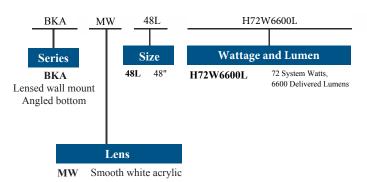



| 4                | 0K    |   |
|------------------|-------|---|
| Color Temperture |       | F |
| 30K              | 3000K | ( |
| 35K              | 3500K | ( |
| 40K              | 4000K |   |
| 50K              | 5000K |   |
|                  |       |   |

| CHEND                |   |  |
|----------------------|---|--|
|                      |   |  |
| Finish               |   |  |
| BLANK<br>CH<br>CHEND | White(standard) Chrome finish Chrome finish |  |

## **Options**

SW2 Pull chain, 2 way switching (Use with single ballast) Grounded convenience oulet (North

**GCO** American 3 Prong)

\*SW2 and GCO options available for 120V models only.



#### \*Consult for more options

Texas Fluorescents

2055 Luna Rd. Suite 142 Carrollton, TX 75006 Phone: 972-247-3171 Fax: 972-247-0200

www.texasfluorescents.com emaiil: sales@texasfluorescents.com

| Catalog Number: |  |
|-----------------|--|
| Notes:          |  |


# BKA Series LED Wall Mount, Angled Front






#### **DIMENSIONS**

All dimensions are inches. Specifications subject to change without notice.

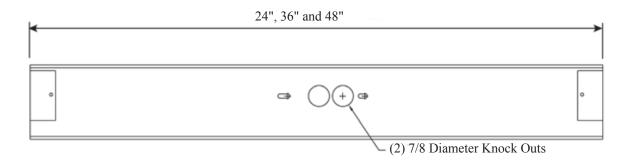

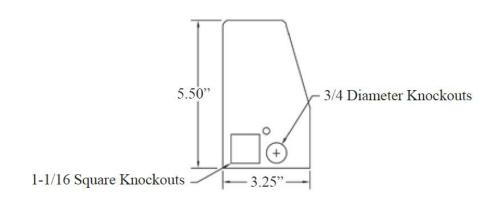



Catalog Number:
Notes: