

FEATURES & SPECIFICATIONS

INTENDED USE

The BKS a specification grade wall mount for the bath, stairwells, office, and “over the bed” applications, and is distinguished by excellent lighting distribution and craftsmanship.

SIZE

W x L x H in inches (mm)

4.1875H x 2.625W (85 x 140)

Available in 24, 36, and 48in (610, 915, 1220) lengths

MOUNTING

Direct wall mount.

MATERIALS & FEATURES


Housing is die-formed and embossed code 22 gage steel. Standard finish is high reflectance baked white enamel; chrome ends or full chrome body are available as an option. Wiring knockouts are provided on back of housing. Lens is fully captured by end plate.

End cap held in place with acorn nut.

- Standard high reflectance white finish with smooth white lens
- Chrome body, or chrome ends only finishes available.
- Options include prismatic lens, special ballasts, pull chain switches, and convenience outlets.

BKS Series

LED Wall Mount, Classic Square

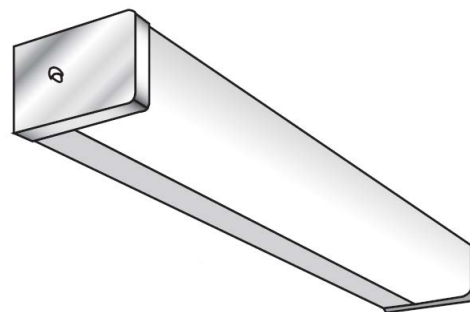

TYPICAL OPTIONS AND ACCESSORIES

Custom finishes, pull chains, convenience outlets. See options page at the end of the T02WallF section, or contact factory for more details.



ORDERING INFORMATION

STANDARD

Example: BKSMW48LS24W2200LDMV40KCHEND

BKS	MW	48L	S24W2200L	DMV	40K	CHEND
Series	Size	Wattage and Lumen	Driver	Kelvin Temperature	Finish	Options
BKS	24L 24"	S12W1100L** 12 System Watts, 1100 Delivered Lumens	DMV 0-10V	30K 3000K	BLANK White(standard)	SW2 Pull chain, 2 way switching (Use with single ballast)
Direct wall mount	48L 48"	S24W2200L* 24 System Watts, 2200 Delivered Lumens	MV ? gfl - Ha f 120V-277V	35K 3500K	CH Chrome finish	GCO Grounded convenience outlet (North American 3 Prong)
Classic Square		*28W not available in 24" length		40K 4000K	CHEND Chrome finish	
Silhouette Fixture		**12W is not available in 48" length		50K 5000K		*on end caps only
LENS						
MW Smooth white acrylic						

*SW2 and GCO options available for 120V models only.

HIGH OUTPUT

Example: BKSMW48LS40W3600LDMV40KCHEND

BKS	MW	48L	H40W3600L	DMV	40K	CHEND
Series	Size	Wattage and Lumen	Driver	Kelvin Temperature	Finish	Options
BKS	24L 24"	H20W1800L** 20 System Watts, 1800 Delivered Lumens	DMV 0-10V	30K 3000K	BLANK White(standard)	SW2 Pull chain, 2 way switching (Use with single ballast)
Direct wall mount	48L 48"	H40W3600L* 40 System Watts, 3600 Delivered Lumens	MV ? gfl - Ha f 120V-277V	35K 3500K	CH Chrome finish	GCO Grounded convenience outlet (North American 3 Prong)
Classic Square		*40W is not available in 24" length		40K 4000K	CHEND Chrome finish	
Silhouette Fixture		**20W is not available in 48" length		50K 5000K		*on end caps only
LENS						
MW Smooth white acrylic						

*SW2 and GCO options available for 120V models only.

*Consult for more options


BKS Series

LED Wall Mount, Classic Square





T E X A S

F L U O R E S C E N T S

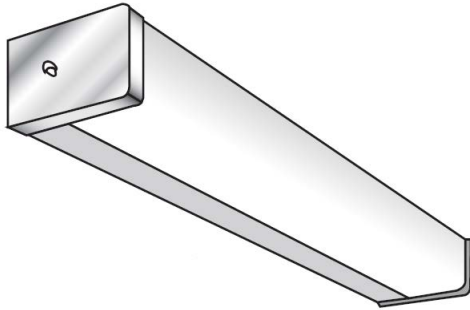

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

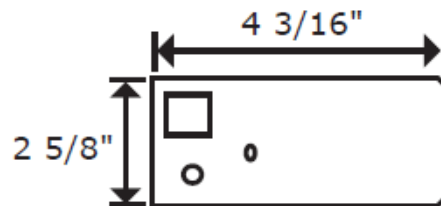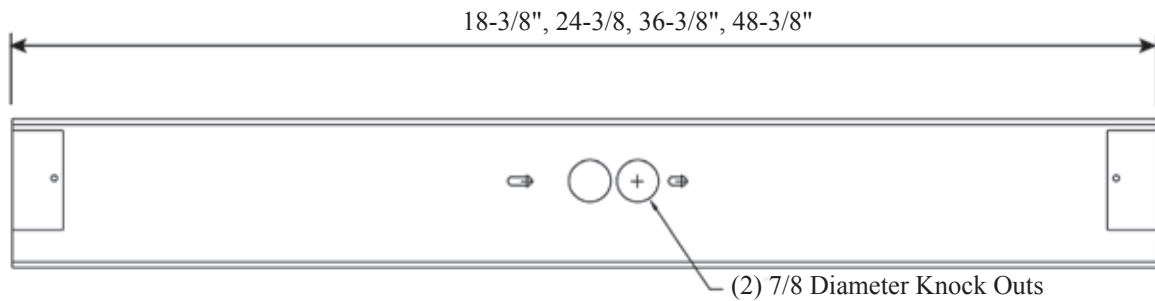

Catalog Number:

Notes:

Texas Fluorescents
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200

www.texasfluorescents.com email: sales@texasfluorescents.com