

Direct Replacement LED T8

Features:


- 4 feet LED T8 tube
- Environmentally friendly with no mercury
- High lumen efficiency & high CRI
- Replaces existing fluorescent T8 lamp without removing electronic ballast
- Compatible with instant-start electronic ballasts
- LED 50,000 life hours
- Ten year limited warranty
- ETL listed



Specifications (based on use with IS ballast):

Model	ZY-T8-15W1200 BIXX BALLAST COMPATIBLE LED TUBE (xxxxK Frosted/Clear)	ZY-T8-18W1200 BIXX BALLAST COMPATIBLE LED TUBE (xxxxK Frosted/Clear)
Ballast Input Voltage	120-277V	120-277V
Wattage	15W (17W with ballast)	18W (21W with ballast)
Lumen	1900 lm	2200lm
Color Temperature	4000K / 5000K	4000K / 5000K
CRI	80+	80+
Power Factor	> 0.95	> 0.95
THD	< 20%	< 20%

Dimensions:

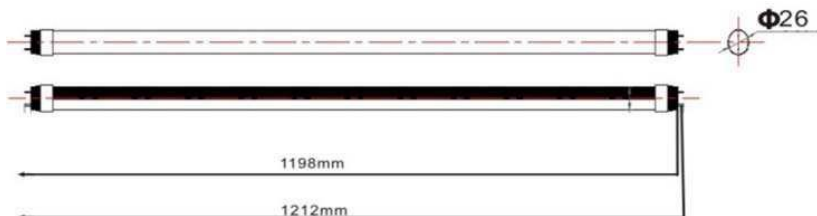

Nominal length: 48"
 Base to base: 47.2"
 Pin to pin: 47.7"
 $\phi = 1.0"$

Installation:

1. Switch off power to the light fixture
2. Remove existing fluorescent lamp
3. Install & rotate LED T8 replacement lamp

PHONE

EMAIL

WEB