




PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION


1. To prevent personal injury or product damage only licensed electricians should install.
2. To avoid electrical shock or component damage, disconnect power before attempting installation or servicing.
3. This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
4. Disconnect product and allow cooling prior to any further steps.
5. Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
6. To prevent product malfunction and/or electrical shock this product must be properly grounded.
7. This luminaire is designed to operate in ambient temperatures ranging from -25°C to 40°C and to be horizontally mounted with the LED board facing downward.

Surface-mounted with J-BOX


1. Loosen the screw on the side of the housing and pull out the connecting plate

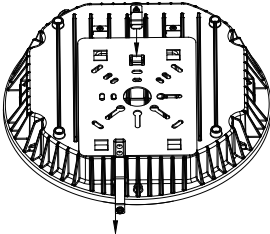

2. Fix the connecting plate onto the ceiling and put the wire through center hole

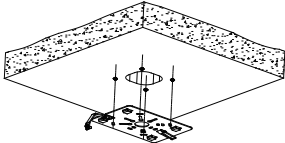


3. Buckle the connecting plate into the clips and connect the wires as following shows




Black	○	Line
White	○	Neutral
Green/Yellow	○	Ground

4. Slide lamp back into the connecting plate and fix the screw that is removed in step one

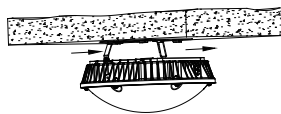


Pendent Installation with 3/4 inch conduit

1. Loosen the screw on the side of the housing and pull out the connecting plate,

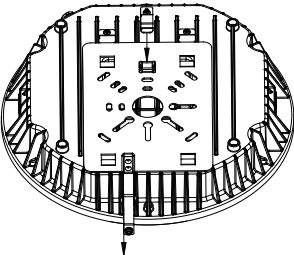


2. connect the wires as following shows,

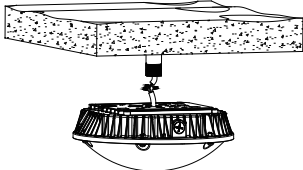


Black	○	Line
White	○	Neutral
Green/Yellow	○	Ground

3. Screw the lamp and conduit pole together tightly

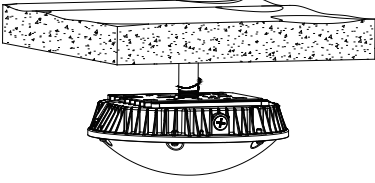


Surface-mounted with side-wiring


1. Remove the lens and metal cover in the middle




2. Cut off wires coming out of 3/4" hole and seal the hole with provided plug. Drill 4 holes on four corners and fix it onto the ceiling with suitable screws

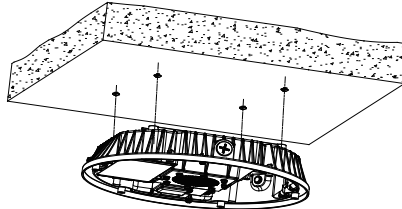


3. Remove 1/2" plug against the direction you intend to connect the conduit

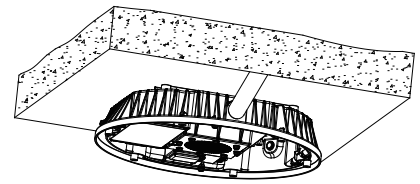

4. Relocate the wire from 3/4" hole to 1/2" hole and connect to the conduit as following

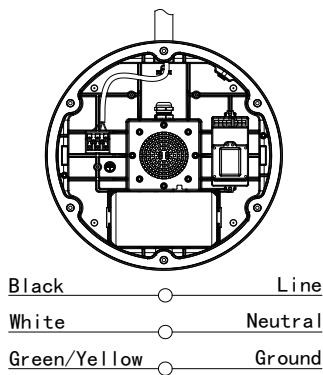


5. Put back the middle metal cover and lens, make sure no wires are pinched or exposed during the whole process

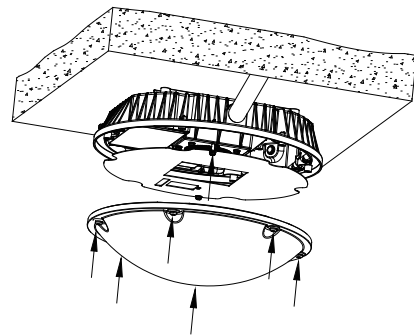


Sensor set-up

1. Remove the lens



2. Adjust the combination of DIP switches with appropriate tool according to needs



3. Put back the lens and check the function of sensor

