



## MaxLite® LED Enclosed & Sealed Jelly Jars

### General Safety Information

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For Residential installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- **DO NOT INSTALL DAMAGED PRODUCT!**
- This fixture is intended to be connected to a properly installed and grounded UL listed junction box.



Picture is for illustration purposes only. Your model may vary.

### **WARNING:**

#### RISK OF ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

### **CAUTION:**

#### RISK OF INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

### **CAUTION:**

#### RISK OF FIRE

- Keep combustable and other materials that can burn away from luminaire and lamp/lens
- MIN 60°C SUPPLY CONDUCTORS.

**JJW12000** - Jelly Jar Wall Mounted 120V E26 Socket Wet Silver W/O Lamp

**JJP12000** - Jelly Jar Pendant Mounted 120V E26 Socket Wet Silver W/O Lamp

**JJC12000** - Jelly Jar Ceiling Mounted 120V E26 Socket Wet Silver W/O Lamp

**JJW12001** - Jelly Jar Wall Mounted 120V E26 Socket Wet Silver W/ 9W A19 SBLED Lamp 3000K

**JJW12002** - Jelly Jar Wall Mounted 120V E26 Socket Wet Silver W/ 10W SBLED Puck Lamp 3000K

**JJP12001** - Jelly Jar Pendant Mounted 120V E26 Socket Wet Silver W/ 9W A19 SBLED Lamp 3000K

**JJP12002** - Jelly Jar Pendant Mounted 120V E26 Socket Wet Silver W/ 10W SBLED PUCK Lamp 3000K

**JJC12001** - Jelly Jar Ceiling Mounted 120V E26 Socket Wet Silver W/ 9W A19 SBLED Lamp 3000K

**JJC12002** - Jelly Jar Ceiling Mounted 120V E26 Socket Wet Silver W/ 10W SBLED Puck Lamp 3000K


# MaxLite® LED Enclosed & Sealed Jelly Jars

## General Wiring Diagram

**⚠ WARNING**

**CAUTION:** Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.

Note that the fixtures are supplied with two 150°C leads. The white lead is to be connected to the neutral and the black lead to the power (line) lead. Attach ground wire to junction box “GRD” by means of green screw. Grounding for pendent mount fixture is by means of attaching wire to “GRD” on fitter backing using green screw provided. Make all wiring connections in accordance to local and NEC wiring procedures. Be sure any unused wiring entrances are closed with closure plugs provided.





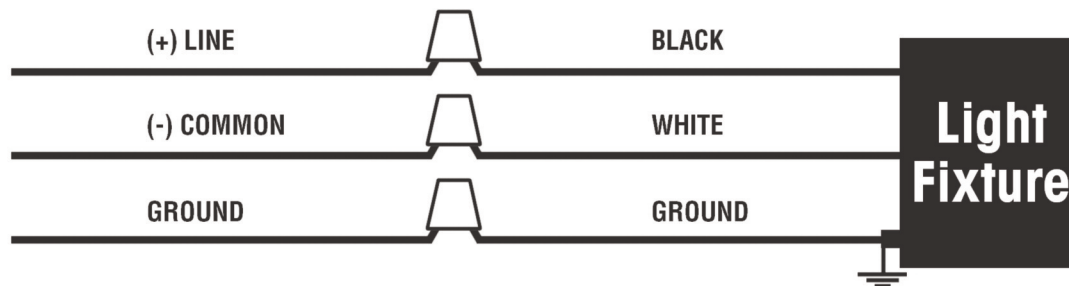


## Installation

### Ceiling Mount:

Lighting Fixture must be located on ceiling, lamp socket opened down, and not be recessed and cannot be mounted upside down in wet locations.

1. Turn off power to branch circuit.
2. Unscrew wire guard and globe.
3. Remove cast adaptor plate from base junction box by removing two 5/8" long screws.
4. Attach the round base junction box to ceiling with screws provided by others. **(Fig. 1)**
5. Apply weatherproof silicone sealant between ceiling and base junction box to ensure a weatherproof installation.
6. Run conduit to junction box if application calls for it and pull supply leads into junction box. Use the wire extensions if needed to leave at least 6" of leads showing.
7. Make wiring connections, following General Wiring Diagram above. Be sure to secure any loose wiring connections safely inside junction box. **(Fig. 2)**
8. Align gasket using the two 5/8" long screws and secure adaptor plate to the junction box. **(Fig. 3)**
9. Install "Enclosed Rated" self ballasted LED lamp (as provided.) Maximum 100W incandescent rated use per UL. **(Fig. 4)**



...Continued on Pg. 3



## MaxLite® LED Enclosed & Sealed Jelly Jars

### Installation




#### Ceiling Mount (Continued)

10. Thread the globe and guard onto adaptor plate and tighten set screws. Be sure not to cross thread. **(Fig. 5 & 6)**
11. Seal all holes, plugs and conduit entrances with weatherproof silicone sealant. Teflon tape use on threads is acceptable sealant means.
12. Restore power to branch circuit.

#### Wall Mount:

Lighting Fixture must be located on Wall, lamp socket opened down, and not be recessed and cannot be mounted upside down in wet locations.

1. Turn off power to branch circuit.
2. Unscrew wire guard and globe.
3. Remove cast adaptor plate from base junction box by removing four 3/4" long screws.
4. Attach the round junction box to wall with screws provided by others. **(Fig. 1)**
5. Apply weatherproof silicone sealant between wall and junction box to ensure a weatherproof installation.
6. Run conduit to base junction box if application calls for it and pull supply leads into base junction box. Use the wire extensions if needed to leave at least 6" of leads showing.
7. Make wiring connections, following General Wiring Diagram (see pg. 2). Be sure to secure any loose wiring connections safely inside base junction box. **(Fig. 2)**
8. Align gasket using four 3/4" long screws and secure adaptor plate to the base junction box. **(Fig. 3)**
9. Install "Enclosed Rated" self ballasted LED lamp (as provided.) Maximum 100W incandescent rated use per UL. **(Fig. 4)**
10. Thread the globe and guard onto adaptor plate and tighten set screws. Be sure not to cross thread. **(Fig. 5 & 6)**
11. Seal all holes, plugs and conduit entrances with weatherproof silicone sealant. Teflon tape use on threads is acceptable sealant means.
12. Restore power to branch circuit.







## MaxLite® LED Enclosed & Sealed Jelly Jars

### Pendent Mount:

Lighting Fixture must be suspended and not be recessed and cannot be mounted upside down in wet locations.

1. Turn off power to branch circuit.
2. Unscrew wire guard and globe.
3. Remove cast adaptor plate from top cap junction box by unscrewing two 5/8" long screws.
4. Attach the top cap junction box to stem.
5. Apply weatherproof silicone sealant between stem and top cap junction box to ensure a weatherproof installation.
6. Run supply wires through stem.
7. Make wiring connections, following General Wiring Diagram (**see pg. 2**) Be sure to secure any loose wiring connections safely inside junction box. (**Fig. 1**)
8. Align gasket using two 5/8" long screws and secure adaptor plate to the top cap junction box.
9. Install "Enclosed Rated" self ballasted LED lamp (as provided.) Maximum 100W incandescent rated use per UL. (**Fig. 2**)
10. Thread the globe and guard onto adaptor plate and tighten set screws. Be sure not to cross thread. (**Fig. 3 & 4**)
11. Seal all holes, plugs and conduit entrances with weatherproof silicone sealant. Teflon tape use on threads is acceptable sealant means.
12. Restore power to branch circuit.





## MaxLite® LED Enclosed & Sealed Jelly Jars

### Fixture Warranty

LIMITED WARRANTY FOR CERTAIN MAXLITE® LED LIGHTING FIXTURES, SPECIFICALLY WALL PACKS; FLOOD LIGHT; AREA LIGHT; CANOPY; GARAGE; PARKING; SECURITY LIGHT; VAPOR TIGHT AND ROADWAY.

This limited warranty is provided by the MaxLite company described below ("Seller") to you as the original purchaser of the LED lighting product that is identified on Seller's invoice reflecting its original purchase (the "Product"). The Seller is the MaxLite Company identified as such on the invoice. This limited warranty may be transferred to subsequent purchasers of the Product, provided that such Product is resold in new condition and in its original packaging. Seller warrants that the Product, when delivered in new condition and in its original packaging, will be free of defects in material and workmanship for a period of FIVE (5) YEARS from the date of original purchase or the number of hours used has not exceeded the L70 life stated for each LED fixture. The determination of whether the Product is defective shall be made by Seller in its sole discretion with consideration given to the overall performance of the Product. A Product shall not be considered defective solely as a result of the failure of individual LED components to emit light if the number of inoperable components is less than 10% of the total number of LED components in the Product.

If Seller determines the Product is defective, Seller will elect, in its sole discretion, to refund you the purchase price of the Product, repair the Product or replace the Product. This limited warranty does not apply to loss or damage to the Product caused by: negligence; abuse; misuse; mishandling; improper installation, storage or maintenance; damage due to fire or acts of God; vandalism; civil disturbances; power surges; improper power supply; electrical current fluctuations; corrosive environment installations; induced vibration; harmonic oscillation or resonance associated with movement of air currents around the Product; alteration; accident; failure to follow installation, operating, maintenance or environmental instructions prescribed by Seller or applicable electrical codes; or improper service of the Product performed by someone other than Seller or its authorized service provider. This limited warranty excludes field labor and service charges related to the repair or replacement of the Product. THIS LIMITED WARRANTY IS VOID IF THE PRODUCT IS NOT USED FOR THE PURPOSE FOR WHICH IT IS DESIGNED.

Seller reserves the right to utilize new, reconditioned, refurbished, repaired or remanufactured products or parts in the warranty repair or replacement process. Such products and parts will be comparable in function and performance to an original product or part, as determined by Seller in its sole discretion, and warranted for the remainder of the original warranty period.

In order to make a warranty claim, you must notify Seller in writing within sixty (60) days after your discovery of the defect, provide proof of purchase such as the invoice and comply with Seller's other warranty requirements. Upon receiving that notice, Seller may require you to promptly return the Product to Seller, or its authorized service provider, freight prepaid. Your warranty claim should be addressed to MaxLite, Inc., 12 York Ave. West Caldwell NJ 07006.

This limited warranty only applies to specified LED fixtures. Backup batteries, photocells, mounting accessories and other fixture accessories can be found at [www.MaxLite.com/lighting/products/warranty](http://www.MaxLite.com/lighting/products/warranty).

THE FOREGOING WARRANTY PROVISIONS ARE EXCLUSIVE AND ARE GIVEN AND ACCEPTED IN LIEU OF ANY AND ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY AGAINST INFRINGEMENT AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

IN NO EVENT SHALL SELLER BE LIABLE FOR INCIDENTAL, COMPENSATORY, CONSEQUENTIAL, INDIRECT, SPECIAL OR OTHER DAMAGES. SELLER'S AGGREGATE LIABILITY WITH RESPECT TO A DEFECTIVE PRODUCT SHALL IN ANY EVENT BE LIMITED TO THE MONIES PAID TO SELLER FOR THAT DEFECTIVE PRODUCT.

This warranty is effective for purchases of Product on or after the effective date set forth below. Seller reserves the right to modify this warranty from time to time. Any modification of this warranty shall be effective for all orders placed with Seller on or after the effective date of such revised warranty.

Effective Date: May 12, 2014



# MaxLite® LED Enclosed & Sealed Jelly Jars

## Lamp Warranty

Dated: March 22, 2016  
 For Professional, Industrial/Commercial Users and Applications Only.

### LED RETROFITS LIMITED WARRANTY

MaxLite warrants each LED Lamp listed below to be free from defects in materials and workmanship and to operate from the date of purchase. The foregoing warranty is subject to these Terms and Conditions. If Product fails to operate during the Warranty Period, MaxLite will, at its option, replace or repair the Product or grant Purchaser a credit towards Product replacement.

If MaxLite grants a replacement and Product is not available, a comparable product will be provided. MaxLite will not be responsible for labor costs of Product removal or installation.

For avoidance of doubt, "to replace the Product" does not include any removal or reinstallation costs or expenses, including without limitation labor costs or expenses, shipping costs to return nonconforming Products or any damages that may occur during the return of Product to MaxLite.

LED Lamps (Description)	Warranty Period
Bulbs (A-shape).....	60 months (4,380 hours per year)
Globes .....	60 months (4,380 hours per year)
Candles.....	60 months (4,380 hours per year)
MR16 GU10/GU5.3.....	60 months (4,380 hours per year)
PAR .....	60 months (4,380 hours per year)
BR .....	60 months (4,380 hours per year)
Marquee Bulb .....	60 months (4,380 hours per year)
Linear T5.....	60 months (4,380 hours per year)
Linear T8 & U-Bend	
Standard .....	60 months (4,380 hours per year)
Linear T8- 10 Year.....	120 months (4,380 hours per year)
G9 Base.....	60 months (4,380 hours per year)
Post Top .....	60 months (4,380 hours per year)
Puck .....	60 months (4,380 hours per year)
BayMax .....	60 months (4,380 hours per year)
PL.....	60 months (4,380 hours per year)
Filament .....	36 months (4,380 hours per year)

This limited Warranty is subject to the following additional conditions: The Products have been installed and operated in accordance with the manufacturer's instructions, which currently are contained in "MaxLite Product Library" available at the following URL: <http://www.maxlite.com/product-library>

The Products have not been subject to accident, neglect, abuse, misuse or acts of God. A MaxLite representative will have access to the failed Products and the fixtures used to operate them. If the fixture or other parts become suspect, the representative shall have the right to invite other manufacturers' representatives to evaluate the lighting system components.

The Product has been purchased directly from an authorized MaxLite distributor/dealer. This warranty is limited to lamps purchased for use in regions that are within the jurisdiction of the United States and Canada.

Purchase receipt for the Product is available for inspection by MaxLite.

The warranty and remedy set forth herein do not apply to Products, parts, advice, assistance or service which MaxLite furnishes to purchaser as a business courtesy. The warranty is not applicable to any Product which is used in violation of any applicable standard, code or instructions for use, including those contained in the Standards for Safety of Underwriters Laboratory, Inc. (UL), Standards for the American Standards Institute (ANSI), in Canada, the Canadian Standards Association (CSA).

THE FOREGOING WARRANTY IS EXCLUSIVE, AND THE SOLE REMEDY FOR ANY AND ALL CLAIMS, IN CONTRACT, IN TORT OR OTHERWISE ARISING FROM THE FAILURE OF PRODUCT AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ALL WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WHICH WARRANTIES ARE HEREBY DISCLAIMED. THE LIABILITY OF MAXLITE SHALL BE LIMITED TO THE TERMS OF THE EXPRESS WARRANTY SET FORTH HEREIN. IN NO EVENT WILL MAXLITE BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING, WITHOUT LIMITATION, DAMAGES RESULTING FROM LOSS OF USE, PROFITS, BUSINESS OR GOODWILL, WHETHER OR NOT MAXLITE HAS BEEN ADVISED OF THE POSSIBILITY THEREOF.