


4

3


2

1

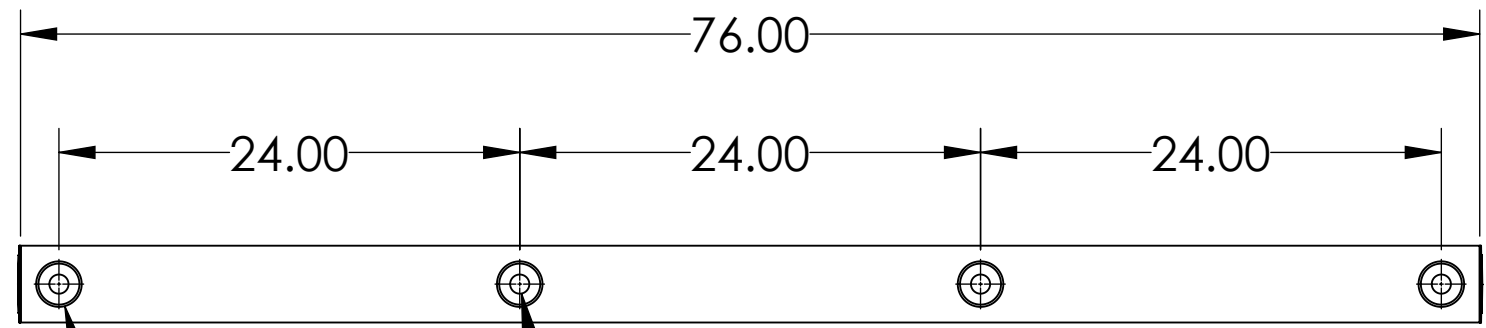

ϕ 2.38 OD
 ϕ 2.14 ID
 Tenon
 (4 Places)


ϕ 1.00 ID
 Conduit
 Hole
 (4 Places)

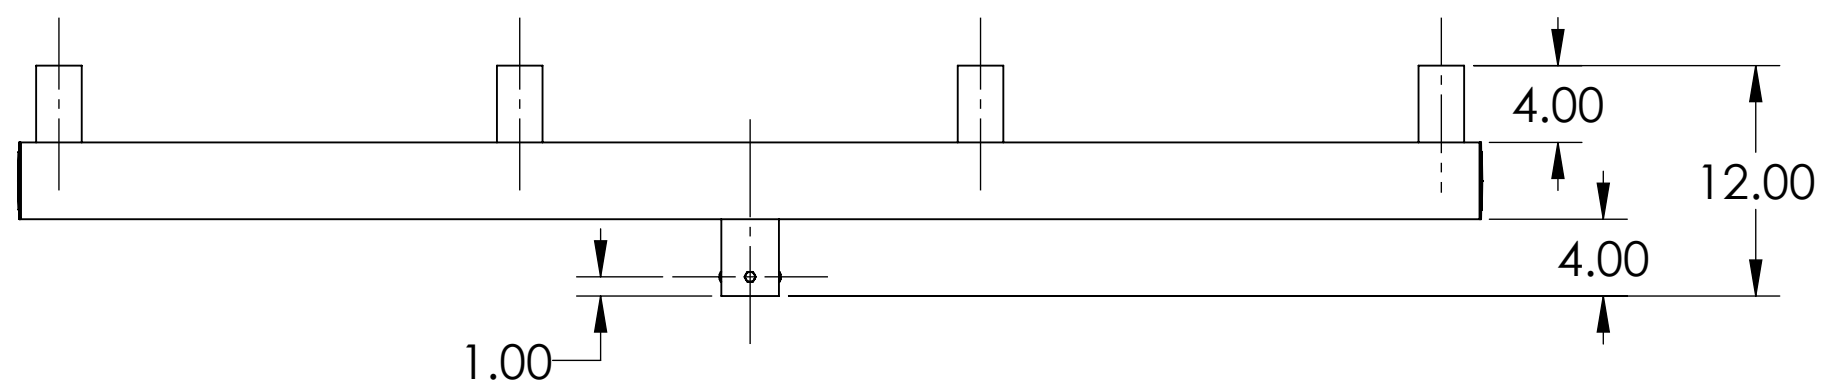

Hex Head Screw
 M8x1.25 25 mm Long
 Black Oxide
 3 Places 120° Apart

4" Standard
 Square Pole
 Cap
 (2 Places)

EPA(ft²) : 3.6



ϕ 3.00 OD
 ϕ 2.76 ID

ϕ 1.00 ID
 Conduit
 Hole

All dimensions and specifications are subject to change without any notice.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF *Energy Light, Inc.* ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF *Energy Light, Inc.* IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE: Low Profile Bullhorn with 4 Tenons Inline	
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: $\pm 0.5^\circ$ TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005		DRAWN	MKA		
		INTERPRET GEOMETRIC TOLERANCING PER:		ENG APPR.			SIZE B
		MATERIAL STEEL		MFG APPR.			
NEXT ASSY	USED ON	FINISH		 1881 Rose Road Lake Zurich, IL 60047		REV	
APPLICATION		DO NOT SCALE DRAWING				SCALE: 1:10	WEIGHT: 33 lbs

4

3

2

1

B

B

A

A