


159 Series

Corridor Light

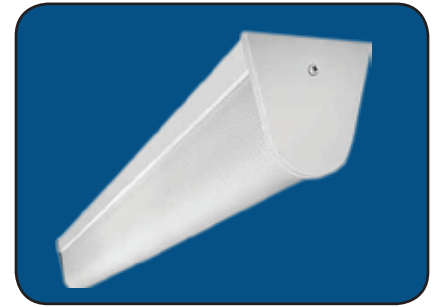

FEATURES & SPECIFICATIONS

INTENDED USE

Surface mounted corridor fixture with low brightness linear sides. Vandal resistant. Available in lengths from 18 to 96 inches. For use in indoor applications, such as hallways, bathrooms, aisles and stairwells.

SIZE W x L x H in inches (mm)

4.62W x 24.0L x 4.5Dp

4.62W x 36.0L x 4.5Dp

4.62W x 48.0L x 4.5Dp

LAMP

1 lamp positions

MOUNTING

White opal acrylic wraparound diffuser. Screw fastened end caps secures diffuser in place. Single or continuous row mounting capability. Steel housing with white enamel finish.

MATERIALS & FEATURES

Housing and ends are die-formed cold rolled steel. Finish is high reflectance baked white enamel. Wraparound extruded ribbed white opal diffuser designed for durability and visual comfort. Diffuser is held in place on both ends by the screw fastened end caps. End caps may be removed for continuous row mounting with the use of optional joiner assembly. Mounts over electrical junction box. Mounting holes are provided. Knock-outs are provided for stem mounting.

TYPICAL OPTIONS & ACCESSORIES


Emergency ballasts, whips, fuses, and cord sets. Contact factory for more details.

LISTING

Every fixture individually tested.
UL labeled for damp location.

ORDERING INFORMATION

Example: 159A232MV

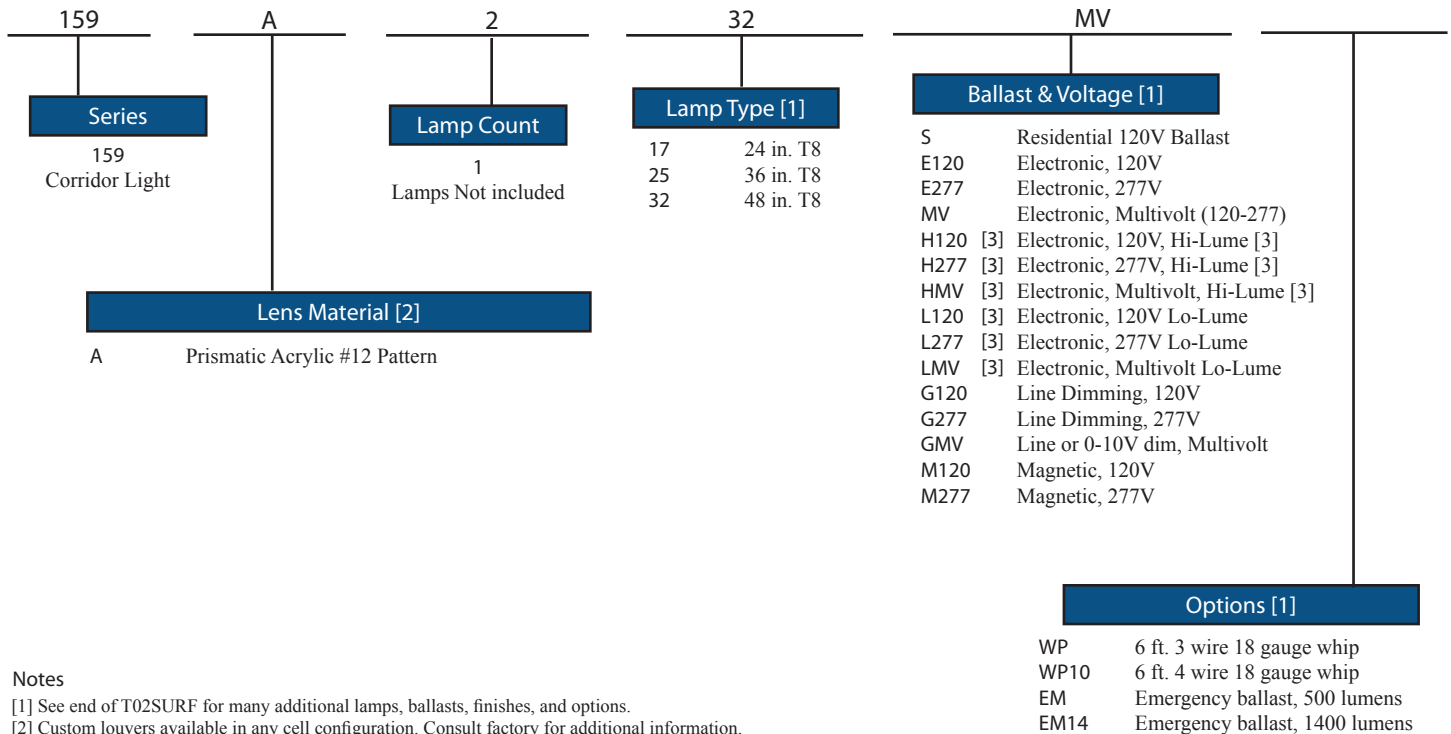

Notes

- [1] See end of T02SURF for many additional lamps, ballasts, finishes, and options.
- [2] Custom louvers available in any cell configuration. Consult factory for additional information.
- [3] HiLume and LoLume ballasts available for T8 lamps only.
- [4] Consult factory for custom finishes.

Note: EM14 required for T5HO lamps

| |
|-----------------|
| Catalog Number: |
| Notes: |


159 Series

Corridor Light



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.



| |
|-----------------|
| Catalog Number: |
| Notes: |