



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Give your facility a clean and sleek look with this LED premium round lensed strip with reflector. This fixture is sure to enhance any environment, provide energy savings, and give better quality lighting. This fixture is cost effective and makes this perfect for: interior warehouse, retail, and utility areas requiring general illumination in a commercial quality strip configuration..



FEATURES & BENEFITS

- End plate doubles as a coupler for continuous row mounting
- Available in 24", 48", and 96" (2', 4', & 8') lengths
- $L_{70} > 50,000$ hrs.
- Min CRI 80
- 5 year warranty.

DIMENSIONS


W x L x H in inches

24 in: 4.25"W x 24.00"L x 3.25"H


48 in: 4.25"W x 48.00"L x 3.25"H

96 in: 4.25"W x 96.00"L x 3.25"H

Reflector W30

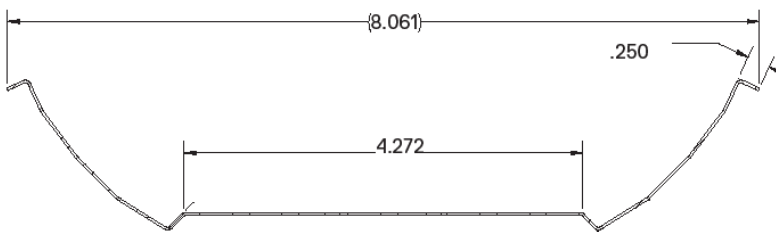

Reflector W35



Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:


TYPE:

DIMENSIONS


96 inch

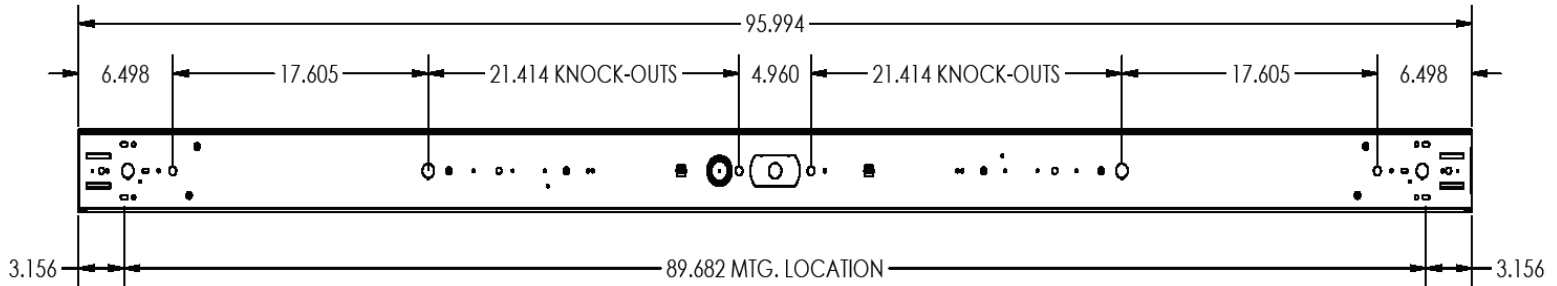

48 inch

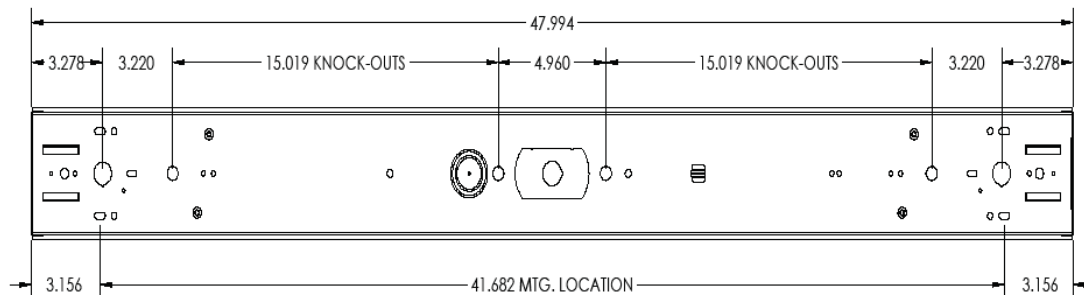

24 inch

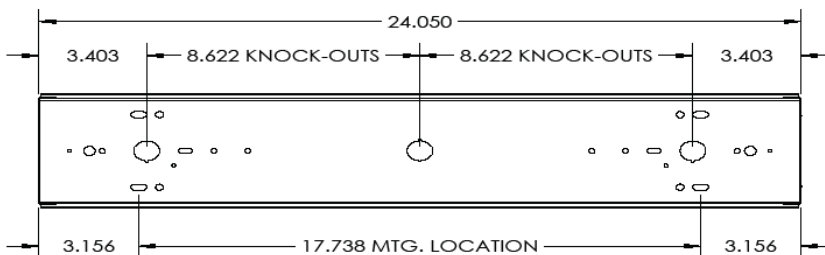

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 1FSF 24 LED 24 DMV MW 40 W30

LED

1. SERIES	2. LENGTH	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. LENS	7. COLOR TEMP
1FSF	24 24" long 48 48" long 96 96" long	LED	24 in. 18 18 Watts 1980 Lumens 24 24 Watts 2640 Lumens 28 28 Watts 3080 Lumens 30 30 Watts 3300 Lumens 48 in. 24 24 Watts 2640 Lumens 30 30 Watts 3300 Lumens 35 35 Watts 3850 Lumens 48 48 Watts 5280 Lumens 57 57 Watts 6270 Lumens 96 in. 48 48 Watts 5280 Lumens 57 57 Watts 6270 Lumens 70 70 Watts 7700 Lumens 97 97 Watts 10670 Lumens 118 118 Watts 12980 Lumens	DMV 120-277V Multivolt 0-10V Dimmable	Blank No Lens MW Matte White Lens ¹	30 3000K 35 3500K 40 4000K 50 5000K

8. REFLECTOR	9. REFLECTOR TYPE	11. EM (O) ²	12. SENSOR (O) ²	13. PLUG IN OPTIONS (O) ²	14. CORD (O) ²
W30 White Symmetrical Reflector W35 White Asymmetrical Reflector	Blank Solid Reflector U 15% Up Light	EM Emergency Battery Pack 10W ~1300 Lumens	OS Occupancy Sensor	PI1 3 wire harness, including white, black, and green PI3D 5 wire harness, including white, black, green, and blue for emergency battery backup	CS 6' cord 18/3 WP 6' whip 3 wire MC *See cord and whip ordering chart below

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage ³	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

Notes:

¹Matte white lens is about 10% light loss

²(O) is Optional

³Not available with "TL" or "P"

Dimensions and specifications subject to change without notice.

