

2-0345 2-0346 2-0347

Round Puff Ceiling Fixture



Features

Housing

Die-formed Cold-rolled Steel

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp

LED Type: Built-in (More Color Temperature Option – 3500K, 5000K)


CFL Type: T9 Circline or GU24 CFL Lamp (More Color Temperature Option – 2700K, 4000K)

Certifications

UL/cUL, ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Warranty on Driver and LED Module

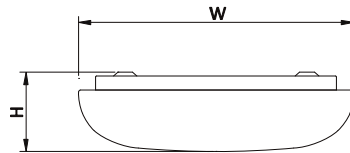

LED Type

Model	Input Voltage	Input Wattage	LED CT	CRI	Lumen (Typ)	Dimension (L X W X H)	Energy Star
2-0345D-3000K	120V	18W	3000K	> 80	1340	11.0" x 11.0" x 3.2"	Yes
2-0345D-4100K	120V	18W	4100K	> 80	1400	11.0" x 11.0" x 3.2"	Yes
2-0346D-3000K	120V ~ 277V	24W	3000K	> 80	2000	14.0" x 14.0" x 3.4"	Yes
2-0346D-4100K	120V ~ 277V	24W	4100K	> 80	2100	14.0" x 14.0" x 3.4"	Yes
2-0347D-3000K	120V ~ 277V	35W	3000K	> 80	2800	19.0" x 19.0" x 3.8"	
2-0347D-4100K	120V ~ 277V	35W	4100K	> 80	2900	19.0" x 19.0" x 3.8"	

CFL Type

Model	Input Voltage	Input Wattage	Shade	Lamp	Dimension (L X W X H)	Energy Star
2-0345PG-123	120V	23W	Opal Acrylic	1 x 23W GU24	11.0" x 11.0" x 3.2"	
2-0346PG-213	120V	26W	Opal Acrylic	2 x 13W GU24	14.0" x 14.0" x 3.4"	
2-0347	120V	54W	Opal Acrylic	22W+32W T9 Cir.	19.0" x 19.0" x 3.8"	