



LED Battery Backup

INFORMATION

Available
Installed in These
DuraLED Fixtures:



WCTRSC3*



WCTRDC3



MWPQ



LWPQ



HMWP-DOQ



MWPCOQ




SACCORDQ



LACCORD



DuraLED Dart Round Bulkhead

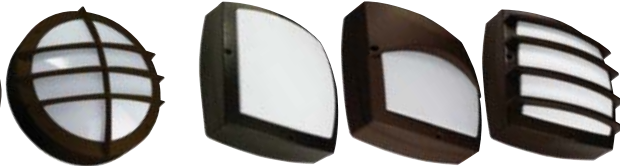

DuraLED Dart Square Bulkhead



DuraLED Dome Bollards*



DuraLED Flat Top Bollards*



DuraLED Square Bollards*

LED Battery Backup

Provides 90 Minutes of Backup Power.

- 100-277/50-60Hz Input Voltage
- Operation Temperature Range: 0°C to 50°C
- Green LED indicator for stand-by mode
- Optional test switch
- Short-Circuit, Overload, and No Load protection.
- Low battery shutdown to protect battery from deep-discharging
- RoHS Compliant
- **3EBL120277** - 3300 mAh rechargeable Ni-MH battery
(*Indicates fixtures using this model. All others use 3EBL1202774500.)
- **3EBL1202774500** - 4500 mAh rechargeable Ni-MH battery

BATTERY BACKUP

MORE FIXTURES ON BACK!

Specifications subject to change without notice.

INFORMATION



9X9Q



12X12Q



VN43Q



DGARAGEQ



GARAGEQ



VN55Q



HMWP-UDQ



MSCOWPQ



LWPQ



WPC12Q*



WPC44Q



WPC45Q



ORIONQ



DuraLED Round Orah Series*



DuraLED Square Orah Series*



DuraLED Ovation Series

Specifications subject to change without notice.

BATTERY BACK-UP