

44 Series

Direct / Indirect Linear Fixture



FEATURES & SPECIFICATIONS

INTENDED USE

A linear 4 x 4 surface-mounted fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies, and office areas, 4 x 4 Series fixtures can be installed individually or in group patterns.

SIZE W x L x H in inches (mm)

4ft. - 4" x 48" x 4"

8ft. - 4" x 96" x 4"

LAMP

2 or 4 lamp positions

HOUSING

Die-formed and welded 22-gauge cold rolled steel Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity. Uplight fixtures have two rows of 1/2" x 4" apertures along the top of the housing to provide approximately 12% uplight for ceiling illumination.

DIFFUSERS (not included)

Fixture accepts various lenses or louvers. 6' and 8' units have a steel mullion to join two individual diffusers.

MOUNTING

Fixtures can be surface mounted to the ceiling or pendant hung by stem or cable.

LISTING

Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors Hanging kits, Wire guards. Contact factory for additional options.

ORDERING INFORMATION

Example: 44SMW228MVWH

44	S	MW	2	28	MV	WH
Series			Lamp Count		Ballast & Voltage [1]	Finish
44			2 or 4			WH White BK Black SI Silver
Direct/Indirect			Lamps Not included			
Lighting Distribution			Lamp Type [1]		E120 Electronic, 120V E277 Electronic, 277V MV Electronic, Multivolt (120-277) H120 Electronic, 120V, Hi-Lume [3] H277 Electronic, 277V, Hi-Lume [3] HMV Electronic, Multivolt, Hi-Lume [3]	
S Direct Only SI Uplight Only DI Direct/Indirect			28 46 in. T5 32 48 in. T8 54 46 in. T5HO			
	Lens Material [2]				Options [1]	
	SPI Specular Parabolic Louver PLA White Cubed Acrylic Louver A Prismatic Acrylic #12 pattern MW Matte White Lens				EM Emergency ballast, 500 lumens EM14 Emergency ballast, 1400 lumens HC301WH Cable kit with 4' Cable & Power Feed/Cable Incl. and White Canopy HC302WH Cable kit with 12' Cable and Power feed/Cable Incl. and White Canopy 2SCS24WH Two Stem kits with 24" Stem, Canopy and Mounting hardware for a 4' fixture	

Note: EM14 required for T5HO lamps

Notes

[1] See end of T02LINEAR for many additional lamps, ballasts, finishes, and options.

[2] Custom louvers available in any cell configuration. Consult factory for additional information.

[3] HiLume and LoLume ballasts available for T8 lamps only.

Texas Fluorescents

2055 Luna Rd. Suite 142 Carrollton, TX 75006

Phone: 972-247-3171 Fax: 972-247-0200

www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:

Notes:

44 Series

Direct / Indirect Linear Fixture










T E X A S

F L U O R E S C E N T S



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

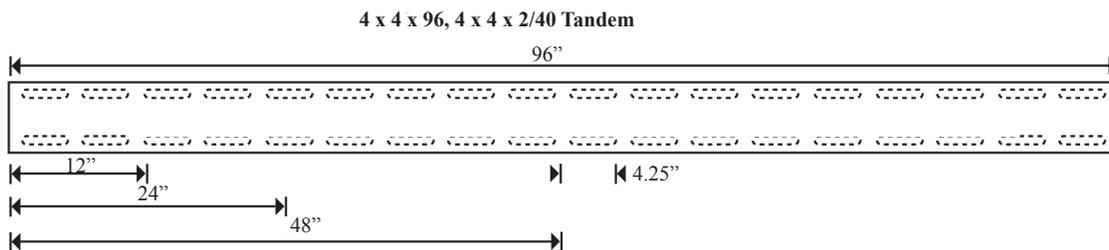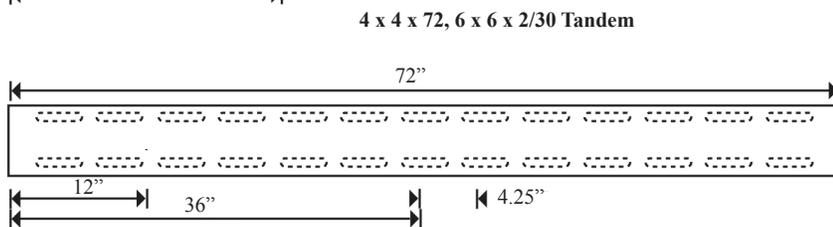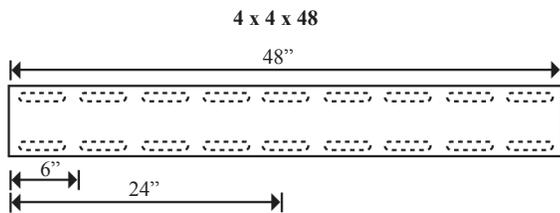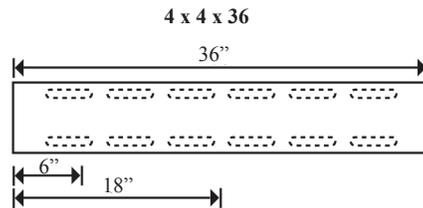

Catalog Number:
Notes: