



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS



Angled LED chrome fixtures provide softly angled light. Designed for bathrooms, kitchens, bulletin boards and above vanity mirrors.

Housing and ends are die-formed from cold rolled steel. Finish is post chrome plated on housing and end caps. One piece end caps fasten with singleacorn type nut. Extruded white translucent acrylic diffuser provides soft illumination. Diffuser is retained by a grooved formation running the length of the fixture and is held in place by the end caps. Mounting holes are provided. Mounts over electrical junction box. Knockouts are provided for flexible conduit attachment. Optional decorative contour bands are available when units are row mounted.



- Post chrome plated steel housing is standard
- Smooth white opal acrylic wraparound diffuser
- Single or continuous row mounting with optional contour band
- Highest quality long life LED
- Min CRI 82
- Double the life expectancy of fluorescent technology
- Optional white enamel finish available
- Every fixture individually tested
- ETL Listed for damp locations

### DIMENSIONS

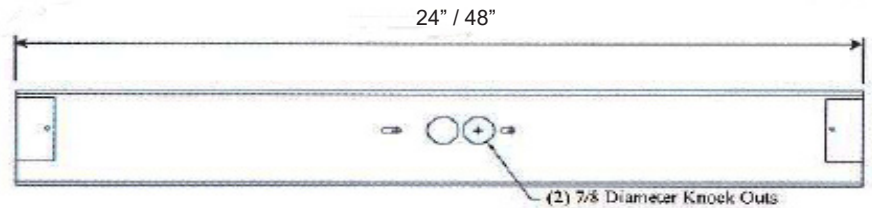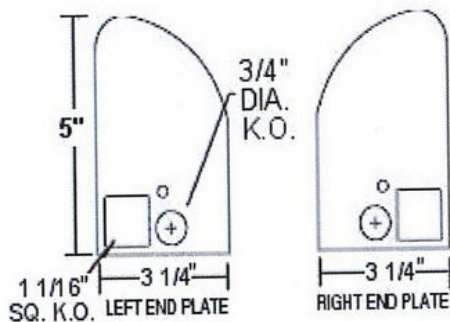

Dimensions and specifications subject to change without notice.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: 74 24 LED 24 DMV 30

74		LED							
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. HOUSING		7. COLOR TEMP
74	24 24" 48 48"	LED	<u>2 Ft.</u>		DMV	120-277V Multivolt 0-10V Dimmable	(Blank)	Chrome (std)	30 3000K
			<u>4 Ft.</u>		SDMV	Step dimming Multivolt	WH	White	35 3500K
			24	24 Watts 2250 Lumens	DHV	347-480VAC 0-10V Dimming			40 4000K
			28	28 Watts 2250 Lumens	D347V	347VAC 0-10V Dimming			50 5000K
			24	24 Watts 2250 Lumens	D120	Triac Dimming 120VAC			
			48	48 Watts 4500 Lumens	D277	Triac Dimming 277VAC			
			57	57 Watts 5100 Lumens					

**8. PULL CHAIN(O)'**

PS1 Single position  
pull chain

**ACCESSORY**

A99 Convenience outlet

**NOTES:**

'O is optional

**ACCESSORIES**

Lumens are subject to a tolerance of ±10% and not relevant to RGB  
Input wattage can vary depending on options  
Dimensions and specifications subject to change without notice.

Dimensions and specifications subject to change without notice.

