



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS




This heavy duty constructed LED premium round wraparound is ideal for individual or continuous runs with solid ends. It has a low initial cost, and is available in a 48" and 96" lengths. The housing is completely die formed from heavy gauge cold rolled steel, and design embossed ends are locked and secured to the housing. The wireway cover snaps on or off with or without tools for easy assembly.



### FEATURES & BENEFITS

- Surface or pendant mounted
- Completely die formed from heavy gauge cold rolled steel
- Lens has clear acrylic prismatic bottom with ribbed linear sides
- Single or continuous row mounting capability
- Min CRI 82
- cETL<sub>US</sub> listed
- 5 year warranty

### DIMENSIONS

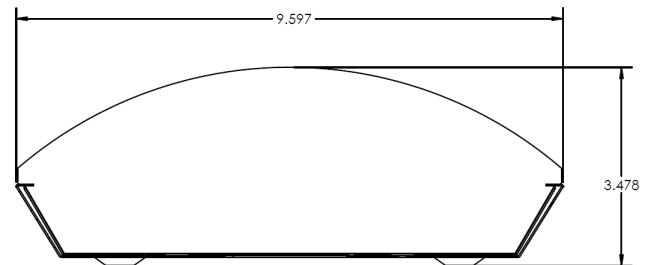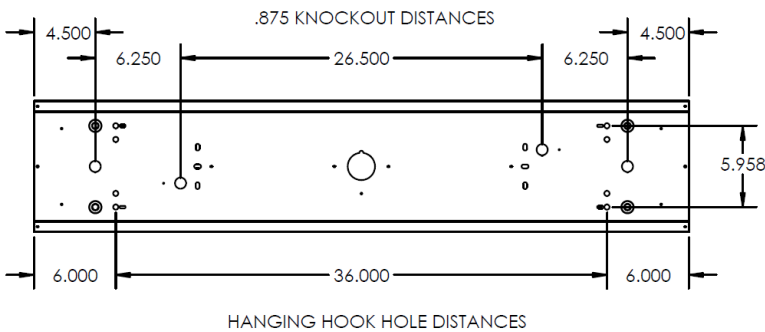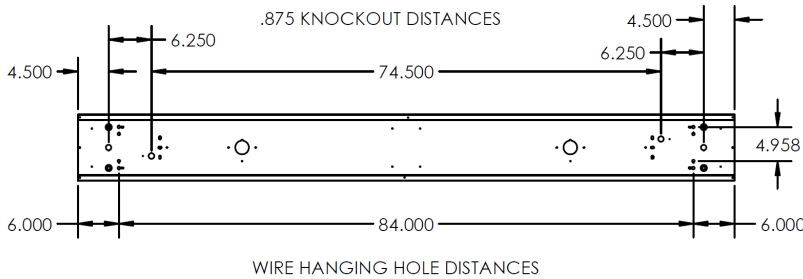

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: 771 48 LED 32 DMV FR 30 WP EM P12

771		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. LENS		7. COLOR TEMP	
771	48 48"	LED	<b>48 inch</b>		DMV	120-277V Multivolt 0-10V Dimmable	FR	Frosted	30	3000K
	96 96"		32	32 Watts 3450 Lumens					RL	Ribbed Linear
			48	48 Watts 4800 Lumens	SDMV	Step dimming Multivolt			40	4000K
			72	72 Watts 7200 Lumens	DHV	347-480VAC 0-10V Dimming			50	5000K
			<b>96 inch</b>		D347V	347VAC 0-10V Dimming				
			48	48 Watts 4800 Lumens	D120	Triac Dimming 120VAC				
			65	65 Watts 7000 Lumens	D277	Triac Dimming 277VAC				
			97	97 Watts 9600 Lumen						

7. CORD	8. EM	9. PLUG IN OPTIONS
WP 6' Whip 3 Wire	EM 10W ~1200 Lumen Battery backup	PI1 3 wire harness, including white, black, and green
	EM7 7W ~840 Lumen Battery backup	PI2 4 wire harness, including white, black, green and blue for emergency battery backup
	EM5 5W ~600 Lumen Battery backup	PI3D 5 wire harness, including white, black, green, violet, and gray

Consult factory for options

**Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

**ACCESSORIES**

Lumens are subject to a tolerance of ±10% and not relevant to RGB  
 Input wattage can vary depending on options  
 Dimensions and specifications subject to change without notice.

Dimensions and specifications subject to change without notice.

