
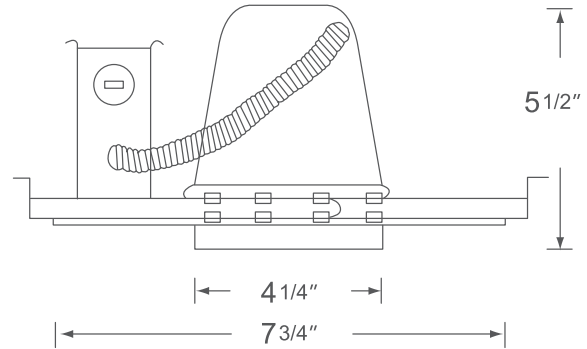


8201HA Series

120V-60Hz

Catalog #:		Type
Project:		Date
Prepared by:		

4" Airtight Frame-In

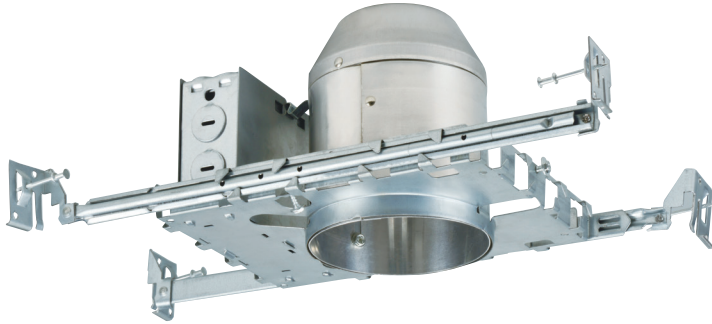

4" Airtight Frame-In

DESCRIPTION

This 8201HA Series is designed for quick and easy installation in existing ceilings. The housing is suitable for residential and commercial applications. Features thermal protector guards, adjustable hangar bars for easy installation.

DESIGN FEATURES

Electrical

- 120V
- Incandescent, 50W Max

Housing

- Sturdy aluminum construction
- Non-IC
- Thermally protected against misuse of insulation and improper lamping
- Adjusts to accommodate up to 1" ceiling thickness
- 5-1/2" height allows use in 2" x 6" joist construction
- Adjustable socket bracket plate for proper positioning of different lamp types

Junction Box

- J-box is listed for through-branch circuit wiring, (4in-4out) and seven 1/2" knockouts
- 3-port quick connectors pre-installed in all J-boxes

Bar Hanger

- Pre-installed bar hangers allow the housing to be positioned at any point within 24" joist span
- Pre-installed captive nails on bar hangers
- Bar hangers can be turned 90° on the plaster frame
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings

Dimensions

- H 5-1/2" x L 7-3/4" x W 5-3/4"
- Aperture: 4-1/4"

Lamp

- R20
- PAR30



Certifications

- cETLus listed for damp location and feed through wiring
- Meets Washington's State energy code for restricted airflow
- 1 year limited warranty

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.




8201HA Series

120V-60Hz

Specification & Ordering

HOUSING

Example: 8201HA

Housing #	Wattage
 8201HA	
8201HA	50 Max (trim Permitting)

MODULE/TRIM

Example: 8756WH-R-12-80-3K

Module/Trim #	Finish	Watt/Lms	CRI	CCT
 8756-R				
8756-R LED Retrofit Disk	WH : White BK : Black OB : Oil Rubbed Bronze BN : Brushed Nickel	-12 : 12W, 730lms	-80 : 80CRI -90 : 90 CRI	-27K : 2700K -3K : 3000K -4K : 4000K


MODULE/TRIM

Example: 8763WH-10-90-3K

Module/Trim #	Finish	Watt/Lms	CRI	CCT
 8763				
8763 LED Retrofit Baffle	WH : White BK : Black OB : Oil Rubbed Bronze BN : Brushed Nickel CL : Clear	-10 : 10W, 600lms	-90 : 90 CRI	-3K : 3000K -4K : 4000K


MODULE/TRIM

Example: 8761BA-9-90-3K

Module/Trim #	Finish	Watt/Lms	CRI	CCT
 8761				
8761 LED Retrofit Square Baffle	OB : Oil Rubbed Bronze BA : Brushed Aluminum	-9 : 9W, 630lms	-90 : 90 CRI	-3K : 3000K

MODULE/TRIM

Example: 8765BN-8-90-3K

Module/Trim #	Finish	Watt/Lms	CRI	CCT
 8765				
8765 LED Retrofit Eyeball	WH : White OB : Oil Rubbed Bronze BN : Brushed Nickel	-8 : 8W, 600lms	-90 : 90 CRI	-3K : 3000K

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

8201HA Series

120V-60Hz

Specification & Ordering


MODULE/TRIM

Example: 8768WH-10-90-3K

Module/Trim #	Finish	Watt/Lms	CRI	CCT
	8768			
	8768 LED Retrofit Eyeball WH : White OB : Oil Rubbed Bronze BN : Brushed Nickel	-10 : 10W, 900lms	-90 : 90 CRI	-3K : 3000K


MODULE/TRIM

Example: 8722WH-10-90-3K

Module/Trim #	Finish	Watt/Lms	CRI	CCT
	8722			
	8722 4" LED Module/ Retrofit Trim WH : White	-10 : 10W, 650lms	-90 : 90 CRI	-3K : 3000K -4K : 4000K


MODULE/TRIM

Example: 8767WH-10-90-3K

Module/Trim #	Finish	Watt/Lms	CRI	CCT
	8767			
	8767 LED Retrofit Gimbal WH : White OB : Oil Rubbed Bronze BN : Brushed Aluminum	-10 : 10W, 900lms	-90 : 90 CRI	-3K : 3000K


MODULE/TRIM

Example: 8769WH-10-82-3K

Module/Trim #	Finish	Watt	CRI	CCT
	8769			
	8769 4" Recessed LED Module WH : White BK : Black OB : Oil Rubbed Bronze BA : Brushed Aluminum	-10 : 10W	-82 : 82CRI: 895lms -92 : 92CRI: 717lms	-3K : 3000K -4K : 4000K

MODULE/TRIM

Example: 8770WH-10-81-3K

Module/Trim #	Finish	Watt	CRI	CCT
	8770			
	8770 4" Recessed LED Module CL : Clear	-10 : 10W	-81 : 81CRI: 889lms -92 : 92CRI: 710lms	-3K : 3000K -4K : 4000K


8201HA Series

120V-60Hz

Specification & Ordering


MODULE/TRIM

Example: 8771WH-10-81-3K

Module/Trim #	Finish	Watt	CRI	CCT
	8771			
	WH : White OB : Oil Rubbed Bronze BN : Brushed Nickel	-10 : 10W	-81 : 81CRI: 887lms -92 : 92CRI: 710lms	-3K : 3000K -4K : 4000K

MODULE/TRIM


Example: 8773WH-11-90-3K

Module/Trim #	Finish	Watt/Lms	CRI	CCT
	8773			
	WH : White	-11 : 11W, 700lms	-90 : 90 CRI	-3K : 3000K -4K : 4000K

Incandescent Trims


MODULE/TRIM

Example: 8701WH

Module/Trim #	Finish
	8701
	WH : White White Baffle 50W Max. PAR20/R20


MODULE/TRIM

Example: 8502FS

Module/Trim #	Finish
	8502
	FS : Fresnel FS-M : Fresnel Shower Trim 35W Max. PAR20/R20

MODULE/TRIM

Example: 8703CL

Module/Trim #	Finish
	8703
	WH : White BK : Black CL : Clear Specular Reflector 50W Max. PAR20/R20

MODULE/TRIM

Example: 8705AL

Module/Trim #	Finish
	8705
	AL : Albalite Albalite Shower Trim 35W Max. PAR20/R20

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.