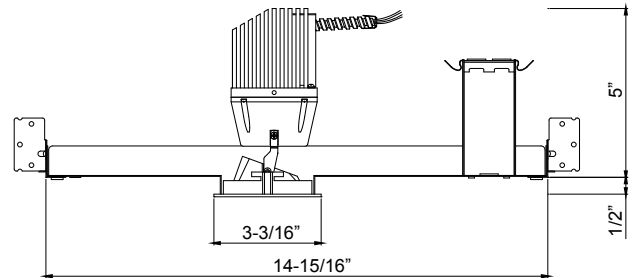


8321H

120V-277V Universal Voltage

Catalog #:		Type
Project:		Date
Prepared by:		

2" Square Frame-In LED



2" Square Frame-In LED

DESCRIPTION

An ideal solution for efficiency, safety, and flexible design aesthetics. Adjustable to position the housing at any point within a 24" joist span or grid section. Balances efficiency and cost to bring you the options needed to complete a variety of retrofit projects with a reliable and modern LED down light solution.

DESIGN FEATURES

Electrical

- 120V-277V Universal Voltage
- Triac and 0-10V dimmable driver
- High efficiency center beam options
- 50,000 hour projected life
- Available in 80 CRI
- Battery Pack Available: -EM
- 10 | 870lms
- 15 | 1200lms
- 23 | 1800lms
- Available in 2700K or 3000K
- Suitable for use in damp locations

Housing

- Adjustable trims may be directional 0-30° tilt and 356° rotational precision adjustment with position lock
- Interchangeable optics for beam spread of N: 15°, M: 38°, W: 60°

Junction Box

- Listed for through branch circuit wiring (4in-4out) with five (5) 1/2" knockouts and 4 non metallic cable knock outs with strong clamps
- 3-port quick connectors pre-installed in J-Box

Bar Hanger

- Pre-installed bar hangers are designed to fit "T" bar spine without additional clamps for use in drop ceilings
- Adjustable to position the housing at any point within a 24" joist span or grid section
- 4 captive nails for quick placement

Dimensions

- 14-15/16" x 5" x 3-3/16"
- Aperture: 3-3/16"

Certifications

- cCSAus listed for damp locations
- State of California Title 24
- 5 year limited warranty



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.


8321H

120/277V

Trim Ordering


HOUSING

Example: 8321H-10-3K-N-EM

Housing #	Lumens	CCT	Beam Spread	Emergency	
 <p>14-15/16" x 5" x 3-3/16" Aperture: 3-3/16"</p>	8321H				
	8321H 120V-277V Universal Voltage	-10 : 10W 870lms -15 : 15W 1200lms -23 : 23W 1800lms	-27K : 2700K -3K : 3000K	-15N : N: 15° -38M : M: 38° -60W : W: 60°	-EM : EM adds Battery Pack


MODULE/TRIM

Example: 8862AJ-WH

Module/Trim #	Finish
 <p>Adjustable 0-30° tilt O. D. 3-3/16"</p>	8862AJ
	8862AJ WH : White

MODULE/TRIM

Example: 8862S-WH

Module/Trim #	Finish
 <p>Straight fixed lamp O. D. 3-3/16"</p>	8862S
	8862S WH : White