

Sunlite 85262 LED Portable Corncob Worklight Fixture, 60 Watts (250W Equivalent), 7,500 Lumens, 80CRI, 10 Foot Cord, Daisy Chain Outlet, On/Off Remote, IP64, 50,000 Hour Lifespan, UL Listed, 5000K Super White


DESCRIPTION:

LED Portable Corncob Worklight Fixtures from Sunlite provide a temporary lighting solution for large areas. Ideal for use at construction sites, work sites, garages, outdoors, and temporary structures in lieu of installing permanent fixtures. Multiple lights can be installed in a string with integrated daisy chain outlet. Each fixture has a standard 10 foot, 16AWG grounded cord and 6000V surge protection. Energy efficient, instant start LED technology will save money versus traditional high-pressure sodium fixtures. 5000K super white color temperature with a full 360 degree beam angle. Durable steel cage and plastic body with high-visibility orange colored canopy. Carrying/hanging handle and non-slip rubber feet for use as a standing fixture. LEDs on the bottom of the fixture provide down light when used overhead. Long 50,000 hour life span. On/off Remote control included. IP64 rated and UL Listed for Damp Location use. For use with 120 volt service.



FEATURES:

- **LED TEMPORARY LIGHTING** - LED Portable Corncob Worklight Fixtures from Sunlite provide a temporary lighting solution for large areas. Ideal for use at construction sites, work sites, garages, outdoors, and temporary structures in lieu of installing permanent fixtures.
- **FIXTURE TO FIXTURE CONNECTION** - Multiple lights can be installed in a string with integrated daisy chain outlet. Each fixture has a standard 10 foot, 16AWG grounded cord and 6000V surge protection.
- **7,500 LUMEN OUTPUT** - Bright 7,500 lumen output (250 watt HID light equivalent) at 5000K super white color temperature. LEDs on the bottom of the fixture provide down light when used overhead. Long 50,000 hour life span.
- **VERSATILE LIGHTING SOLUTION** - Built-in carrying/hanging handle and non-slip rubber feet on the bottom of the cage for use as a standing fixture.
- **UL LISTED** - Durable steel and plastic body with protective cage with high-visibility orange colored canopy. UL Listed for damp location use and IP64 rated. For use with 120 volt service. Diameter is 6.90 inches in

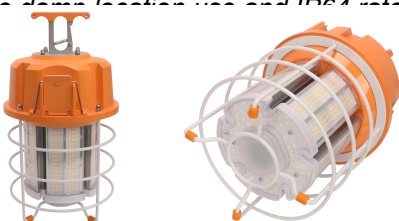

SPECIFICATIONS:

General Characteristics

Average Rated Hours	50000
Finish	Orange
Average Life Span Years	46
Ingress Protection	IP64 (Dust-tight solids, Splashing of water)
Dimmable	No
Material	Aluminum
Lens Material	Polycarbonate

Electrical Characteristics

Watts	60
Volts	120
Equivalent Wattage	250
LED Chip Manufacturer	Samsung 2835
Power Factor	0.9
Temperature	-40?~45?

Light Characteristics

Lumens Brightness	7500
Color Rendering Index CRI	80
Emitted Color	Super White
Color Temperature Kelvin	5000K
Beam Angle	320°
Flicker	Yes

Fixture Characteristics

Shape	Round
Number of Lights	1
Mounting	Portable
Fixture Technology	LED
Use Location	Outdoor

Additional Features

Safety Rating Mark	UL Listed - Damp Location
Safety Rated For Canada	Yes
Safety Rated For USA	Yes

Product Dimensions

MOL (in)	12.09
Diameter (in)	6.93
Item Dimension (in)	(W) 7 (H) 13 (D) 7
Item Weight (lb)	4.450
Package Dimension (in)	(W) 13 (H) 8 (D) 8
Package Weight (lb)	5.580
Cord Length	120"

Product Data

Case Unit Rate	4
Item UPC	653703852621
Warranty Years	5

