


8776
120V-60Hz

Catalog #:		Type
Project:		Date
Prepared by:		

4" IC, LED Recessed Adjustable Gimbal J-Box Downlight

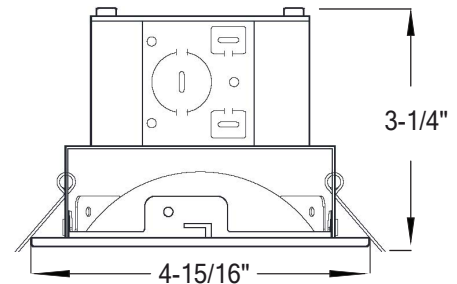

DESCRIPTION

The slim-profile 8776 4" IC-Rated LED Recessed Adjustable Gimbal J-Box Downlight is an all-in-one housing and adjustable trim. Designed for use in new construction or remodel applications with insulated ceiling makes this a quick, easy, and affordable way to upgrade to an energy efficient LED downlight.

DESIGN FEATURES

Construction

- All-in-one housing and adjustable with integral J-Box
- Durable aluminum with integrated trim allowing superior heat distribution
- 360° Rotational Gimbal Axis

Electrical

- 120V-60Hz
- Dimmable TRIAC, 10-100%
- 11.5W | 730 lms (delivered)
- 3000K | 90 CRI
- IC-Rated


Installation

- Listed for through branch circuit wiring and includes (4) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp
- Built-in mouse trap springs for use with direct remodel ceiling or new construction

Accessory Mounting Plate Assembly

8742PF

- Includes four 12" bar hanger to allow for easy adjustment and easy installation
- Durable aluminum construction
- Perfect for installing recessed lighting into new construction



Certifications

- Energy Star Listed
- CEC JA8 Listed
- cCSAus Listed for wet locations
- 5 Year Limited Warranty

ORDERING GUIDE

Example: 8776WH-90-3K

Model #	Finish	CRI	CCT
8776	WH	-90	-3K
8776	WH : White	-90 : 90 CRI	-3K : 3000K
Accessory (sold separately)			
8742PF	: 4" Mounting Plate		

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



1/21/21 R3



RP | LIGHTING · FANS

4" IC, LED Adjustable Gimbal

Available Accessory Information



Accessory Mounting Plate Assembly

- **8742PF**
- Includes four 12" bar hanger to allow for easy adjustment and easy installation
- Durable aluminum construction
- Perfect for installing recessed lighting into new construction



New Construction Mounting Plate Assembly:

1. Align hanger bar brackets with mounting holes on the new construction mounting plate and secure in place with mounting screws (Fig. 1).
NOTE: Hanger bars can be installed on long or short side of the new construction mounting plate.
2. Insert both female and male parts of the hanger bars into the bracket from opposite ends (Fig. 2). Make sure that the male part is inserted within the female part and that the end tab is facing downwards.

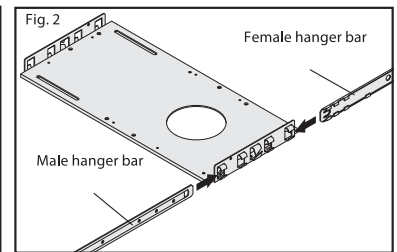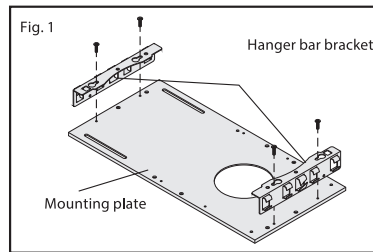

Polar Graph

Polar Graph

