





Shelf lighting  
**ACCENT**



# Shelf lighting

## ACCENT

Accessories	Catalog No.	Description	Length (inch)
	IC-ACCENT-59	 <p data-bbox="771 597 1161 641">Input cable (Must be between the light and splitter)</p>	59"
Accessories (optional)	Catalog No.	Description	Length (inch)
	MC-ACCENT (included)	 <p data-bbox="787 895 1006 917">Screw mounting clips</p>	-
	SC-ACCENT-12	 <p data-bbox="787 1072 950 1094">Soft connector</p>	12"
	MMC-ACCENT	 <p data-bbox="787 1238 1039 1260">Magnetic mounting clips</p>	-

# Shelf lighting


## ACCENT



- Super-slim
- Line voltage fixture
- Smooth continuous lighting
- End-to-end connection
- Easy installation option
- Linkable, max. linkable length: 60'
- 4W/ft, 440lm/ft (@4000K)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -4°F - 95°F (-20°C - 35°C)
- Material: Aluminum Alloy
- Other color temp available



### Dimensions: (inches/mm)

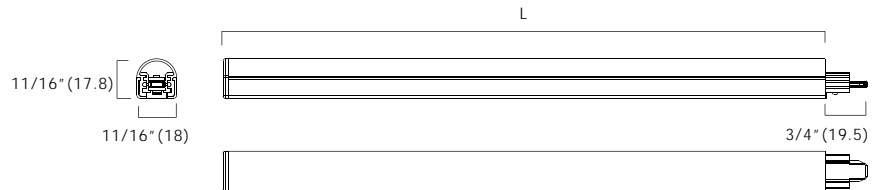

### How to order using our catalog numbers

Example: ACCENT-1130K


Series	Length	CCT (K)	Beam Angle	Finish	Installation
ACCENT	11 - 10.4" (265mm)	30K - 3000K 40K - 4000K	[blank] - 110°	[blank] - Natural Aluminum	[blank] - Mounting Clips
	22 - 21.3" (540mm)				
	32 - 31.9" (810mm)				
	44 - 43.8" (1111.5mm)				

### Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm
ACCENT-1130K	ACCENT-L44-120V	120	85	4	440
ACCENT-1140K					
ACCENT-2230K	ACCENT-L88-120V	120	85	8	880
ACCENT-2240K					
ACCENT-3230K	ACCENT-L132-120V	120	85	12	1320
ACCENT-3240K					
ACCENT-4430K	ACCENT-L176-120V	120	85	16	1760
ACCENT-4440K					

\* Included: 1pc LED fixture, 2pcs Screws, 2pcs Mounting clips, 1pc End cap.


### Photometrics

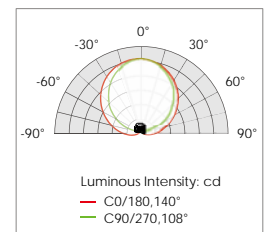

# Shelf lighting ACCENT

Installation

Non-magnetic  
surface installation

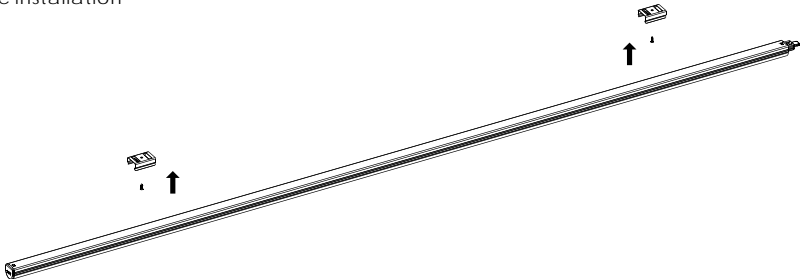

Magnetic  
surface installation

