



4'  
FIXTURE

2'  
FIXTURE

**CCT**TUNABLE

\* U-ST2FT - 24W/30W/35W(CCT Tunable)

\* U-ST4FT - 40W(CCT Tunable)

\* U-ST4FT-40 - 40W


**Description**

The LED Strip Light Series is an all-in-one slim and lightweight lighting solution with a wide array of applications. With a variety of mounting options, these fixtures can be used in commercial and residential applications such as grocery stores, retail shops, warehouses, museums and galleries.



**Features**

- High quality aluminum housing
- Smooth white finish with Frosted Polycarbonate Lens
- Engineered lampshade design for maximum light distribution
- Uniform and anti-glare light distribution
- 0-10V dimming capabilities

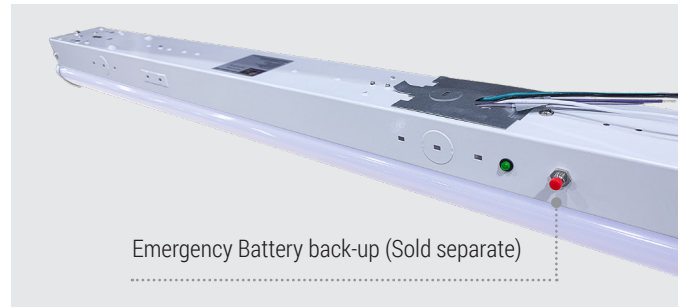

Emergency Battery back-up (Sold separate)

**SPECIFICATIONS**


WATTAGE	2FT 24W/30W/35W	(4FT) 40W
LUMEN	2877 Lm/ 3839 Lm/ 4228 Lm	5200 Lm
EFFICACY	130 lm/W	130 lm/W
CCT	3500K/ 4000K/ 5000K	3000K/ 4000K / 5000K
CRI	80	
INPUT VOLTAGE	AC100-277V	
LIGHT ANGLE	120 °	
POWER FACTOR	0.90	
DRIVER EFFICACY	90%	
DIMMING	0-10V	
LIFE SPAN	Over 50,000 Hours	
WORKING TEMPERATURE	-4 °F - 104 °F	
L70	50,000 Hours	
PROTECTION LEVEL	Suitable for Damp Locations	
CABLE	Input Connect, No Cable	
WARRANTY	5 Year Warranty	

\*U-ST2FT - 24W/30W/35W(CCT Tunable)


\*U-ST4FT - 40W(CCT Tunable)

\*U-ST4FT-40 - 40W


### DIMENSIONS

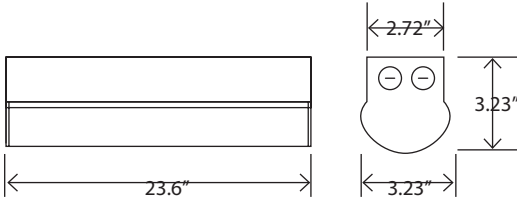

WATTAGE	24W
GR. WEIGHT	8.88 lbs/carton
BOX DIM.	26.2" x 7.5" x 7.7"

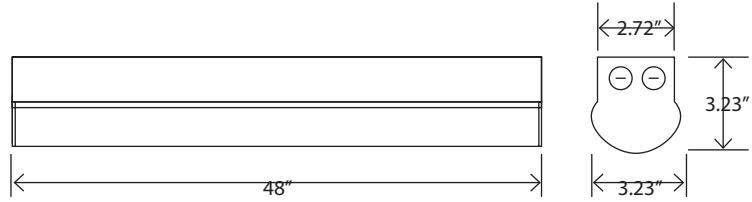

WATTAGE	40W
GR. WEIGHT	24.2 lbs/carton
BOX DIM.	50.6" x 7.5" x 7.7"

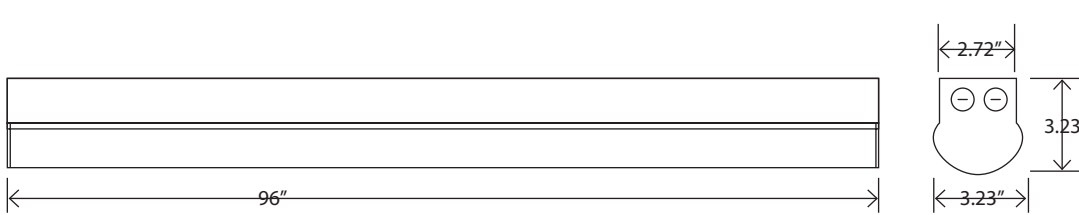

WATTAGE	64W
GR. WEIGHT	41.5 lbs/carton
BOX DIM.	98.8" x 7.5" x 7.7"

### EMERGENCY BACK-UP (SOLD SEPARATELY)



BLD-CM20N-480800-15W  
15W Emergency Backup Battery  
LED Driver

### CONTROLS (SOLD SEPARATELY)



BRI810 // BRI810-B-M6  
Microwave Motion Sensor



BRI819 FOR LHB //  
BRI819P-B-D AC120-277V  
Motion Sensor



RC-100  
Microwave Sensor  
Remote Controller

### ORDERING INFORMATION

DLC Listing : ST2FT3035W27

ST	4FT	40W	CCT
PRODUCT	SIZE	WATTAGE	CCT
ST (Strip Light)	2FT (2-foot)	24W - (24W/30W/35W)	CCT (35K/40K/50K)
	4FT (4-foot)	40W - (40W)	CCT (30K/40K/50K)
	8FT (8-foot)	64W - (64W)	40K - (4000K) 50K - (5000K)

\*U-ST2FT - 24W/30W/35W(CCT Tunable)  
\*U-ST4FT - 40W(CCT Tunable)  
\*U-ST4FT-40 - 40W

**MOUNTING**




SUSPENDED MOUNTING  
(Hardware included)



SUSPENDED MOUNTING  
(Hardware sold separate)



**CONNECT IN SERIES**

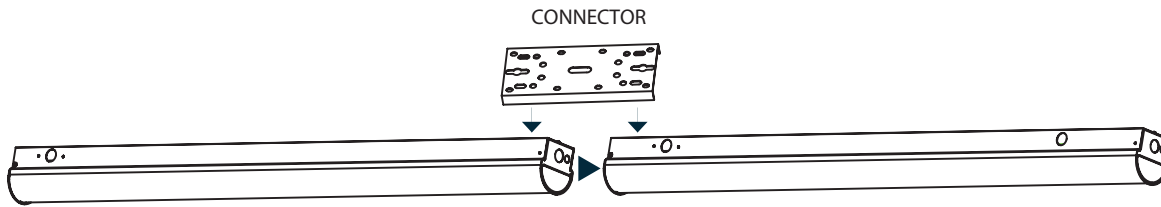

**DIMMING WIRING DIAGRAM**

