

LRVT

LED Round Vapor Tight



Standard

Optional



PRODUCT SPECIFICATIONS

DESCRIPTION

The LRVT is a small round LED perfect for lighting up small areas. The fixture is constructed with sleek latches and captive pins that seal housing and lens together, while providing the option of easy maintenance.

APPLICATIONS

Low bay areas that have limited space for lighting, replacement for existing fixtures, and industrial uses that require an IP67 rated fixture.

CONSTRUCTION

The fixture is constructed of UL 5VA fiberglass, heavily resistant to melting and burning.

OPTICAL SYSTEM

Choice of clear/frosted polycarbonate or acrylic lens. Round LED board gives even illumination.

ELECTRICAL SYSTEM

120-277V Applications, 0-10v dimming.

MOUNTING

Unit can be mounted by hook, pendant with hub, or J-box housing.

LISTINGS

UL listed, wet location rated. IP65, IP66, IP67 rated.

WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.


ORDERING INFORMATION

Example: LRVT-40-SL-CP-M

Series	CCT		Output		Lens		Voltage	
LRVT	27	2700K	SL	Standard Low	CP	Clear Polycarbonate	M	Multi-Volt (120-277VAC)
	30	3000K	ML	Medium Low	FP	Frosted Polycarbonate		
	35	3500K	HL	High Low	CA	Clear Acrylic		
	40	4000K	SM	Standard Medium	FA	Frosted Acrylic		
	50	5000K	MM	Medium Medium				
			HM	High Medium				
			SH	Standard High				

Options	
HKM	Single Hook Mount
PDM	Single Pendant Mount
DMB	Direct Mount with Bracket

FIXTURE DIMENSIONS

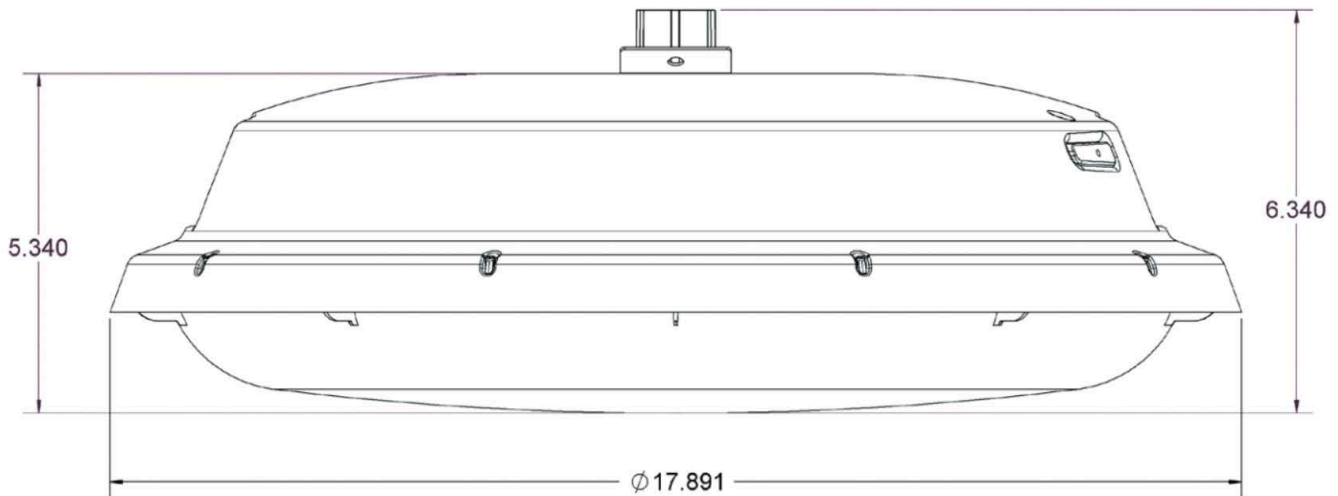

LED SYSTEM DATA

Output	Delivered Lumens	System Wattage	L70 @20C (hrs)
SL	4650	28	>100K
ML	7974	49	>100K
HL	11150	69	>100K
SM	12040	75	>100K
MM	13016	81	>100K
HM	15728	98	>100K
SH	16500	103	>100K

Approximate Color Temperature Multiplier	
5000K	1.03
4000K	1
3500K	0.97
3000K	0.94
2700K	0.91

