

LWV06

LED Wall / Vanity Luminaire



STANDARD

OPTIONAL



PRODUCT SPECIFICATIONS

DESCRIPTION

The LWV06 is an LED wall/vanity luminaire with a smooth white diffuser.

APPLICATIONS

The LWV06 Series of LED Wall/Vanity fixtures are designed to be high quality, energy efficient LED fixtures for use in corridors, stairwells, bathrooms, etc.

CONSTRUCTION

The fixture is constructed of a structurally embossed, heavy gauge, cold rolled steel. White polyester polymer finish with a high reflectivity standard. Bright anodized aluminum finish available.

OPTICAL SYSTEM

Smooth white acrylic or clear prismatic acrylic diffusers available.

ELECTRICAL SYSTEM

0-10V dimming driver standard. Long-life LED system rated for >100K hours (L70 @ 25°C). Complies with federal energy efficiency standards. High output LED's available in 2700K, 3000K, 3500K, 4000K, and 5000K.

MOUNTING

The LWV06 Series is designed for surface mounting on either a wall or ceiling.

LISTINGS

UL and cUL Listed. Damp location rated.

WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

ORDERING INFORMATION

Example: LWV0640SLSWMW4

Custom Lumen Output Example: LWV0640SLSWMW46000

SERIES	COLOR TEMP	OUTPUT	DIFFUSER	VOLTAGE	COLOR	
LWV06	27	2700K	SL Standard Low	SW Smooth White	M Multi-Volt (120-277VAC)	W White
	30	3000K	ML Medium Low	CP Clear Prismatic		A Bright Anodized Aluminum
	35	3500K	HL High Low			SP Custom
	40	4000K				
	50	5000K				

LENGTH	DRIVER	OPTIONS
24 24.25"	BLANK* 0-10V Dimming Driver (included standard)	12EBL 1200 Lumen Emergency Ballast
46 46.25"	CD1 0-10V 1% to Off Dimming Driver	PC Pull Chain
48 48.25"	CD5 0-10V 5% to Off Dimming Driver	CO Convenience Outlet
	EDN Electronic Driver Non-Dimming	WVOC Motion and Sound Detector
	FLDD Fifth Light Dali, Dimming	DLN LED Night Light with Light Level Control
	LDE1 Lutron Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology	VDO Lutron Vive Integral RF controller with daylight and occupancy sensing
	LDE5 Lutron LDE5 5-Series Ecosystem 5% Dimming	FCJS0 Lutron Vive Attached RF fixture controller for 0-10V drivers


**For optional lumen packages, please specify the desired number of lumens at the end of the part#.

Example: LWV0640SLSWMW46000 for 6000 lumens**


Approximate Color Temperature	Multiplier
5000K	1.03
4000K	1
3500K	0.97
3000K	0.94
2700K	0.91

Output	Delivered Lumens	System Wattage	L70 @20C (hrs)
SL	4650	33	>130K
ML	7974	57	>130K
HL	11150	80	>130K



FIXTURE DIMENSIONS

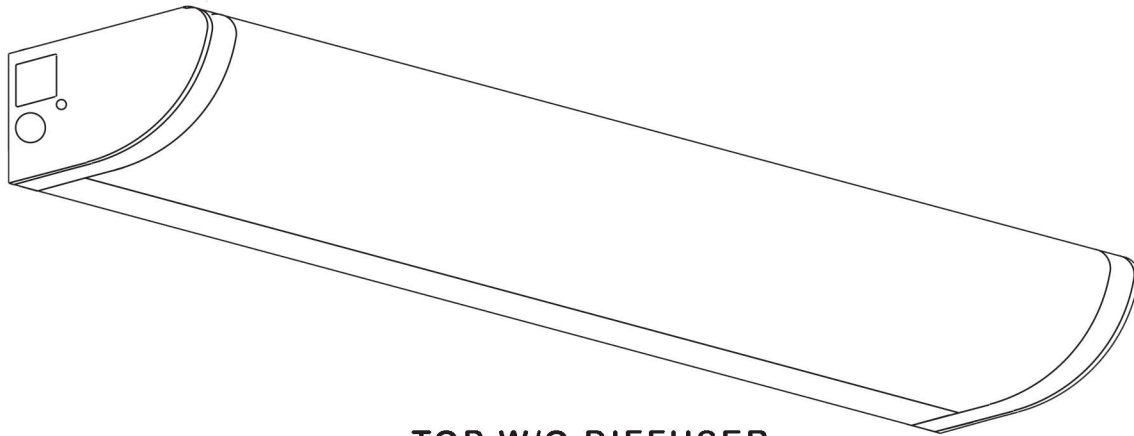


TOP W/O DIFFUSER

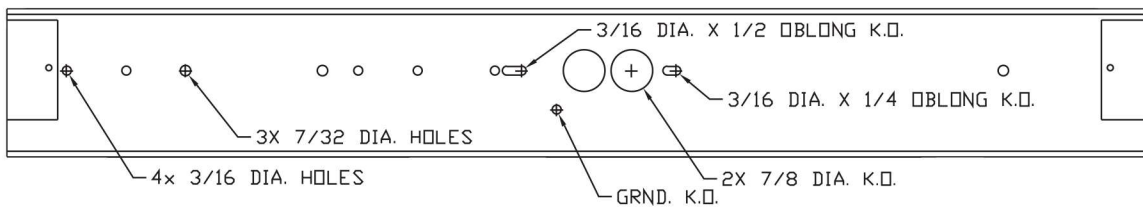

COVER (SHOWN W/ LED)

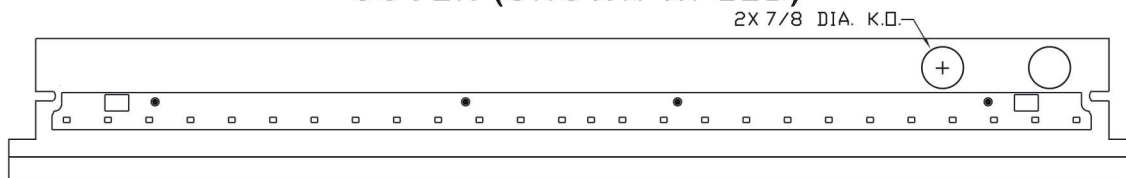


END W/O PLATE

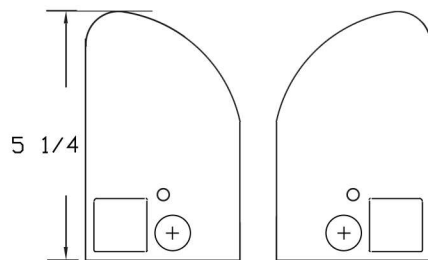

LEFT END PLATE

RIGHT END PLATE

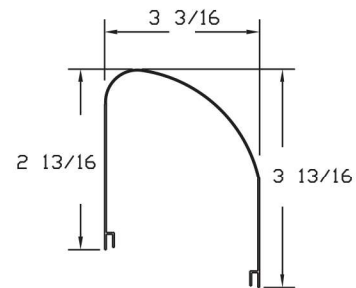

DIFFUSER

END PLATE

STANDARD PAIR HAS KOs
ON BOTH ENDS.
ALSO AVAILABLE WITHOUT KOs