

## DESCRIPTION

The TRBL Series is a Lay-In Troffer Wired for LED Tubes available in 1x4, 2x2, and 2x4 body sizes. It was designed for standard T-Grid applications. Multiple lensing options are available, if additional lenses are needed, consult factory. Architects find these fixtures especially functional for schools, offices, government facilities, public offices, and all other commercial types of applications on the market today. This fixture's multi-use capability inspires its use in any area where energy efficiency is a must. \*No Driver; with non-shunted sockets

## PRODUCT SPECIFICATIONS

### APPLICATIONS

The TRBL Series of Lay-In LED Troffers were designed to be high quality, energy efficient LED fixtures for use in commercial applications, offices, government facilities, schools, and public areas.

### CONSTRUCTION

The fixture is constructed of a heavy gauge steel body. Housing embossed for maximum rigidity. Rounded side flanges for safe handling.

### OPTICAL SYSTEM

White polyester polymer finish with a minimum 93% reflectivity. A variety of lensing options are available.

### ELECTRICAL SYSTEM

120/277V Applications.

### MOUNTING

The fixture can be recess mounted in a standard grid ceiling.

### LISTINGS


UL and cUL Listed. Damp location rated.

### WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at [www.aelnow.com/warranty](http://www.aelnow.com/warranty).

## TRBL

### HIGH QUALITY LAY-IN RECESSED TROFFER LUMINAIRE, WIRED FOR LED TUBES

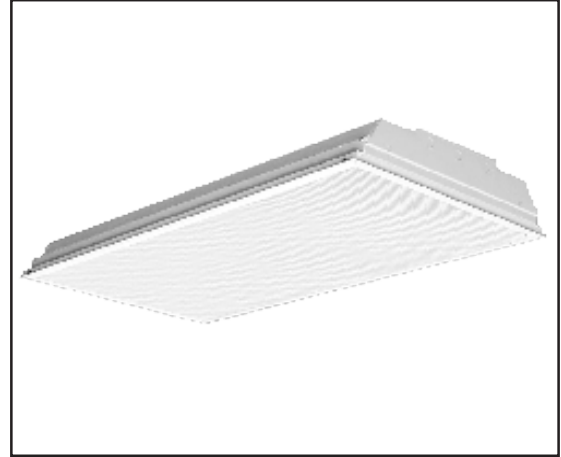

## FEATURES AND BENEFITS

- Housing embossed for maximum rigidity. Rounded side flanges for safe handling
- Four corner tie points for safety wire supports
- Door frames hinges on end from either side of housing

## ORDERING INFORMATION

Example: TRBL232RWAELED

SERIES	LAMPS	LAMP REPLACEMENT	DIFFUSER	WIRE APPLICATION
TRBL1 1x4	2 2 Lamps	17 17W T8 (2")	A .100 #12 ACRYLIC	BLANK SINGLE END WIRING*
TRBL2 2x2	3 3 Lamps	28T8 28W T8 (51.65")	A12 .125 #12 ACRYLIC	DE DOUBLE END WIRING**
TRBL4 2x4	4 4 Lamps	28T5 28W T5 (51.65")		
	6 6 Lamps	32 32W T8 (51.65")		
		54 54W T5HO (51.65")		

LED	WT WATTAGE OPTIONS	COLOR TEMP	OPTIONS
LED WIRED FOR LED LAMPS	10 10 WATT 36" OR 48"	30 3000K	12EBL 1200 LUMEN EMEERGENCY BALLAST
WT WITH TUBES INCLUDED	12 12 WATT 48"	35 3500K	FW FLEXIBLE WHIP ARMoured CABLE
	15 15 WATT 36" OR 48"	40 4000K	FK22 2x2 FLANGE KIT
	18 18 WATT 48"	50 5000K	FK24 2X4 FLANGE KIT
	20 20 WATT 48"		FK14 1X4 FLANGE KIT
			GET Lamp #62407 (LED21T8/G4/840HL)
			GED Driver #62030 (LED21T8/DR/D4L)

\* Non-Shunted sockets wired at one end (BLANK)

\*\*Shunted sockets wired with white, opposite end wired with black (DE)



## FIXTURE DIMENSIONS

