



**JOB NAME:**

**CAT#:**

**TYPE:**

### APPLICATIONS

Give your office a modern look with this 2.2" sleek, linear, direct/indirect channel. It has multi-volt integral driver for easy installation, and male and female wiring harnesses are included to join and hang channels with plug and play ease.



### FEATURES & BENEFITS

- Available with satin aluminum or white finish
- Innovative anti-lightlead clips in the space between diffuser and end-cap
- Integral Driver for 0-10V Dimming
- End removes easily to allow continuous run.
- Integral wiring harnesses makes joining to the next channel easy
- Magnetic light leak block
- $L_{70} > 55000$  hrs.
- Min CRI 80





### DIMENSIONS

**48L**

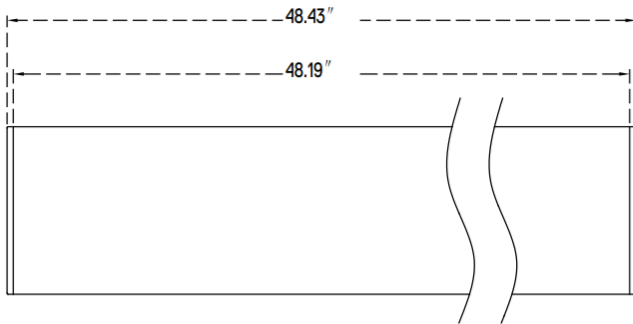

**96L**

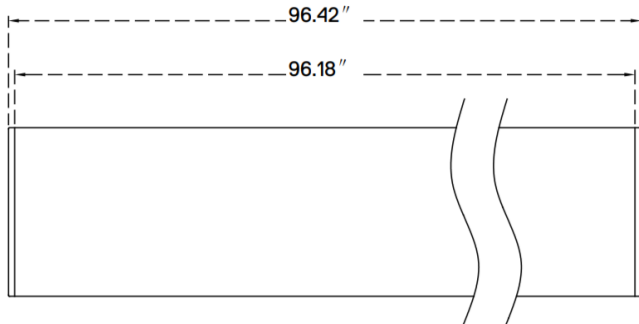

Dimensions and specifications subject to change without notice.



**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: AIOCBF 48 LED 2U3D 45 DMV SA 30 H6W5

AIOCBF		LED							
1. SERIES	2. SIZE	3. GEAR	4. DISTRIBUTION	5. WATTAGE/LUMENS	6. DRIVER	7. FINISH			
AIOCBF	<b>48</b> 48" <b>96</b> 96" <b>144</b> 144" <b>192</b> 192"	<b>LED</b>	<b>2U3D</b> 40% Up and 60% Down	<b>45</b> <u>48"</u> 1800U-2700D Lumens <b>90</b> <u>96"</u> 3600U-5400D Lumens <b>135</b> <u>144"</u> 5400U-8100D Lumens <b>180</b> <u>192"</u> 7200U-10800D Lumens	<b>DMV</b> 0-10V Dimming 120-277VAC Multivolt	<b>SA</b> Satin Aluminum <b>WH</b> White			
8. COLOR TEMP	9. HANGING KIT								
<b>30</b> 3000K <b>40</b> 4000K	<b>H6W5</b> Pendant Mounting Power Feed White Canopy 5 Wire Clear Cord and 6FT Cable <b>H12W5</b> Pendant Mounting Power Feed White Canopy 5 Wire Clear Cord and 12FT Cable								

**ACCESSORIES**

- AIOJOINERTOOL** Tool Required To Use Mechanical Joiner (1 Per Installation needed)
- AIOCLENSTOOL** Tool Required to remove Lens (1 Per Installation Needed)



Dimensions and specifications subject to change without notice.