

# STMR SERIES TAPE LIGHT

24V DC Standard Grade 65.6ft Max Run

For large scale projects, the Max Run series provides a more convenient installation by minimizing drivers and connections. Max Run tape is a great tool for lighting coves, corridors, lobbies, and retail spaces featuring a max run length up to 65 feet.

- Achieve longer max runs perfect for larger installations
- Excellent color rendering (90+ CRI)
- Up to 108-112 lumens per foot performance
- Consuming up to 1.46 watts per foot
- Max run lengths up to 65.6 feet and cuttable every 1.97"
- IP54 rating featuring nano-coating protective layer
- Dimmable (5-100%) with most ELV, TRIAC dimmers
- cULus Listed for indoor dry/damp locations
- 50,000 hours rated life



PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

LOCATION: \_\_\_\_\_

CATALOG NUMBER: \_\_\_\_\_




STMR SERIES QUICK SPECS	
VOLTAGE	24V DC
WATTAGE	1.47W / ft
LUMENS	Up to 112Lm / ft
CCT	3000K
CRI	90+
MAX RUN	65.6ft
CUTTING POINTS	1.97" (50mm)
IP RATING	IP54 - Coated
DIMMING	TRIAC / ELV (5-100%)
DIMENSIONS	10mm (0.39") W x 2mm (0.08") H
BEAM ANGLE	120°
OPERATING TEMP	5°C (41°F) to 70°C (158°F)
CERTIFICATIONS	cULus Listed - Dry / Damp Location
RATED LIFE	50,000 Hours

## STMR SERIES IP RATINGS

**IP54 (Coated)**  
 Features a light nano-coating applied to the tape light and LED's that protects from moisture and dust.  
**Best suited:** Indoor dry & damp locations

## STMR SERIES QUICK LOOK

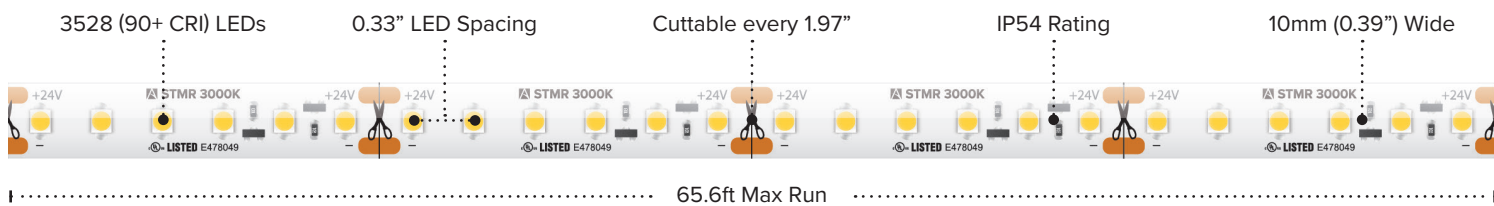


**STMR SERIES ORDERING INFORMATION**

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
<b>STMR-30-65</b>	24V DC	3000K	65.6 ft	110Lm / ft	1.47W / ft	IP54	90+	1.97" (50mm)	65.6 ft


65.6ft Reels (IP54) Include: Attached 3ft Lead Wire / (3) TL-CONKIT / (3) TL-BLKS / (3) TL-2PWR-HD

**STMR SERIES ACCESSORIES**

ITEM NUMBER	DESCRIPTION
<b>TL-CONKIT</b>	6' Trulink 4-in-1 Connection Kit
<b>TL-BLKS</b>	Trulink 4-in-1 Connector Block (QTY 10)
<b>TL-2PWR-HD</b>	6' HD Power Feed (IP54)
<b>TL-2JUMP6-HD</b>	6" HD Linking Cable
<b>TL-2JUMP24-HD</b>	24" HD Linking Cable
<b>TL-2SPL-HD</b>	HD Tape to Tape Splice Connector
<b>TL-2SPL-L-HD</b>	90° "L" HD Tape to Tape Splice Connector (IP54)
<b>WIRE-15-2PIN</b>	15ft (20/2) Wire Spool
<b>WIRE-CMP-100-3PIN</b>	100ft (16/3) In-wall Rated Wire Spool
<b>INLINE-SC-CTRL</b>	Simple Select In-line Controller (Single Color)
<b>LVS-2PIN</b>	In-Line Splice Terminal Block
<b>RCWY-PVC-1M</b>	1m Plastic Wire Cover Raceway (White)

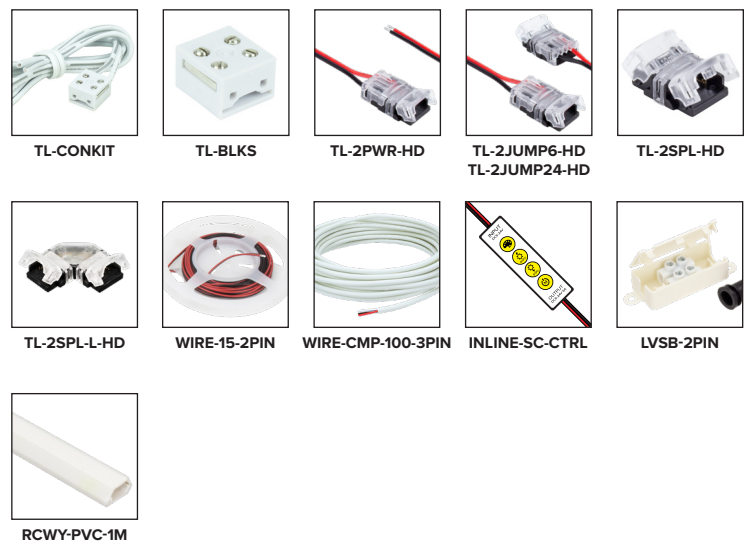

**STMR SERIES QUICK SET-UP**

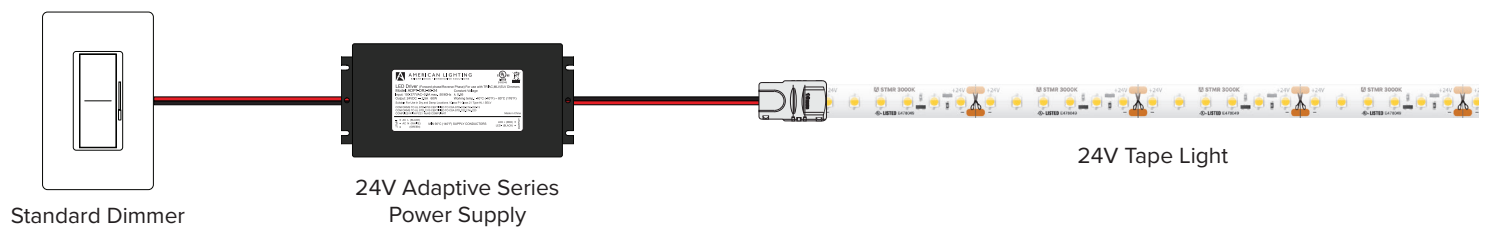

**RECOMMENDED POWER SUPPLIES**

ITEM NUMBER	DESCRIPTION	MAX / MIN LOAD	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMMABLE	DIMENSIONS
<b>ADPT-DRJ-30-24</b>	Adaptive Series 30W	30W / 3W	100-277V AC	24V	Yes*	6.49"L x 3.6"W x 1.02"H
<b>ADPT-DRJ-60-24</b>	Adaptive Series 60W	60W / 6W	100-277V AC	24V	Yes*	7.4"L x 3.6"W x 1.02"H
<b>ADPT-DRJ-96-24</b>	Adaptive Series 96W	96W / 9.6W	100-277V AC	24V	Yes*	8.66"L x 3.6"W x 1.61"H
<b>ADPT-DRJ-192-24</b>	Adaptive Series 192W (2 x 96W)	192W / 19.2W	100-277V AC	24V	Yes*	10.94"L x 4.25"W x 1.8"H
<b>ADPT-DRJ-288-24</b>	Adaptive Series 288W (3 x 96W)	288W / 28.8W	100-277V AC	24V	Yes*	11.85"L x 4.25"W x 1.8"H

\*Phase Dimming Compatible With Most MLV, ELV, and TRIAC Dimmers\*