

Wall-wash Lighting APEX



Wall-wash Lighting APEX




Wall-wash Lighting APEX



- Anti-glare design
- Even wall-wash effect
- Compatible with Halo 'Single Circuit' type track
- Lockable, precision aiming adjustment:
340° aiming horizontal and ±80° vertical rotation
- Lifetime: 50,000hrs (ta=95°F,35°C)
- Ta: -4°F~95°F (-20°C~-35°C)
- Material: Aluminum alloy





Dimensions: (inches/mm)

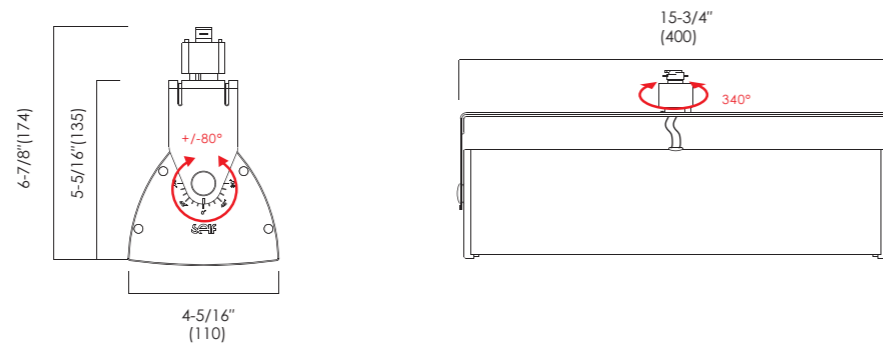

Spacing Distribution of Illuminance(unit:fc)

Specialized Candlepower Distribution

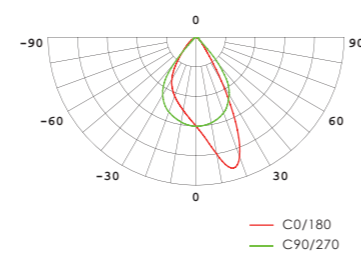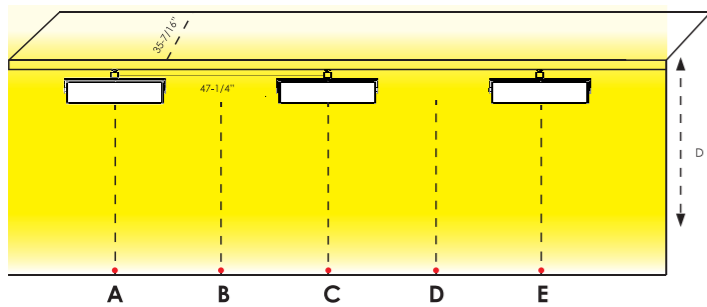

| Distance to Ceiling (D) | A | B | C | D | E |
|-------------------------|--------|--------|--------|--------|--------|
| 1' | 134 FC | 97 FC | 151 FC | 97 FC | 134 FC |
| 2' | 175 FC | 155 FC | 196 FC | 155 FC | 175 FC |
| 3' | 171 FC | 177 FC | 199 FC | 177 FC | 171 FC |
| 4' | 160 FC | 174 FC | 197 FC | 174 FC | 160 FC |
| 5' | 151 FC | 152 FC | 186 FC | 152 FC | 151 FC |
| 6' | 126 FC | 120 FC | 143 FC | 120 FC | 126 FC |
| 7' | 98 FC | 94 FC | 105 FC | 94 FC | 98 FC |
| 8' | 72 FC | 71 FC | 80 FC | 71 FC | 72 FC |
| 9' | 54 FC | 52 FC | 55 FC | 52 FC | 54 FC |
| 10' | 39 FC | 38 FC | 40 FC | 38 FC | 39 FC |

Wall-wash Lighting APEX

How to order using our catalog numbers:

Example: APEX-1530KB

| Series | Length | Color Temp | Finish |
|--------|---------------------|------------------------|------------------------|
| APEX | 15 - 15.75" (400mm) | 30K-3000K 40K-4000K | B - Black W - White |

| Catalog No. | Model | Description | | | | |
|-------------|---------------|-------------|----|---------|---------------|-----------------|
| | | Rated Input | Ra | Wattage | Luminous Flux | Included |
| APEX-1530KB | APEX-L30-120V | 120VAC | 85 | 30W | 3150 lm | 1pc LED fixture |
| APEX-1530KW | | | | | | |
| APEX-1540KB | | | | | | |
| APEX-1540KW | | | | | | |

Installation

