

## ECO Plus Panel

Model:

FPUS22-34W FPUS14-34W

FPUS22-40W FPUS14-40W

FPUS24-40W FPUS24-50W

### Product Description

The new ECO Plus panel is the best bang for the buck indoor LED fixture today without compromising quality.

ECO plus series is derived from the most reputable ATG ECO panel and becomes a more affordable option.

The saving is even more now!

### Performance Summary

---

Input: 100~277VAC

---

Luminous efficacy: Typ. 85 lm/W

---

Lumens: 2900 lm, 3400 lm, 4200 lm

---

CCT: 4000K & 5000 K

---

CRI: >80


---

L70lifetime: 94,000h

---

PF>0.95, THD<10%

---

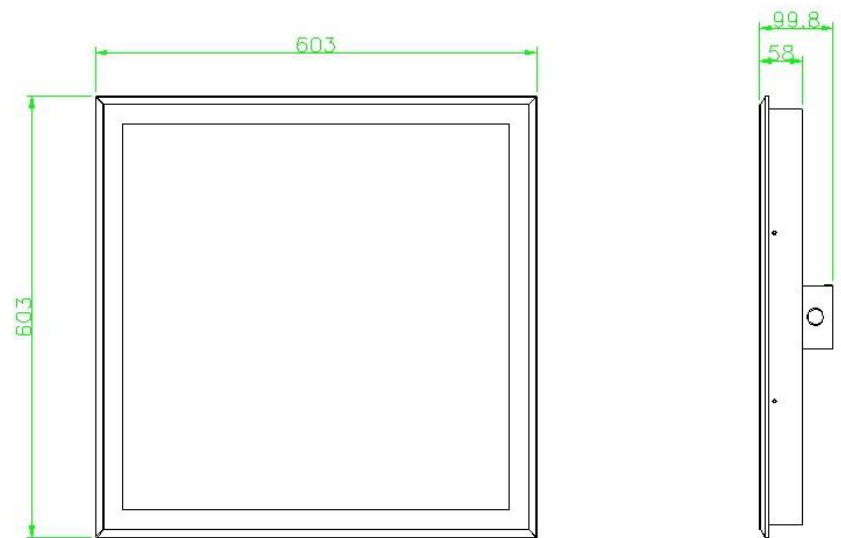

Unit: mm



[www.dyna-brite.com](http://www.dyna-brite.com) Toll free: 800-800-2852 E-mail: [sales@dyna-brite.com](mailto:sales@dyna-brite.com)



ATG ELECTRONICS

## Ordering Information

Typical Order Example: FPUS22-34W-4K

SERIES	STANDARD	SIZE	WATT	CCT
FP=Flat Panel	US=US Size	22=2X2ft 14=1X4ft 24=2X4ft	34W=34W 40W=40W 50W=50W	4K=4000K 5K=5000K

## Product Specifications

CONSTRUCTION & MATERIALS			
Type	2X2	1X4	2X4
Dimension	603*603 mm (23.74*23.74 inch)	301*1212 mm (11.85*47.72 inch)	603*1212 mm (23.74*47.72 inch)
Housing	Cold rolled steel sheet and PC diffuser		
Finish Color	Matt White		
Lens Type	Frosted		

Dimmable Models (0~10V)					Non-Dimmable Models	
Model	2x2	1x4	2x4	2x4	2x2	1x4
Power Consumption	40W	40W	40W	50W	34W	34W
Luminous Flux	3400lm	3400lm	3400lm	4200lm	2900lm	2900lm
Luminous Efficacy	85lm/w					
Color Temperature	4000K & 5000 K					
CRI	>80					
Spacing Criteria	C0/180: 1.25; C90/270:1.25					
Lumen maintenance at 6000h	>95%					

ENVIRONMENTAL SYSTEM	
Work Environment	Indoor use (applicable for dry environments)
Operating Temperature	-20°C ~50°C (-4~122°F)

REGULATORY & VOLUNTARY QUALIFICATIONS
ETL
CE
RoHS
UL/cUL, CE certified external driver



[www.dyna-brite.com](http://www.dyna-brite.com) Toll free: 800-800-2852 E-mail: [sales@dyna-brite.com](mailto:sales@dyna-brite.com)



ATG ELECTRONICS