

Project:	
Type:	
Catalog #:	



STANDARD



FEATURES

- Available in 2700k, 3000k, and 4000k color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 66,000 hours of operation.**
- Color rendering index (R_a) > 80.
- Provides 825 nominal lumens.
- 8 nominal watts.
- Input voltage = 120V 50-60Hz.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Triac dimming.
- Aluminum housing, painted white. Polycarbonate lens.
- Easy installation in new construction or remodel applications. Equipped with torsion clips.
- E26 medium screw-base (Edison) connector comes standard.
- Compatible with BL4ICLED series housings.
- This device is not intended for use with emergency exits.

WARRANTY & LISTINGS

- cULus listed for wet locations.
- Energy Star qualified.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5, input transient protection (1.0kV).
- 5-year warranty of all electronics and housing.


* Contact factory for other color temperatures and lumen packages.

** L_{70} hours are IES TM-21-11 calculated hours.

COMPATIBLE DIMMERS

Manufacturer/Series	Model Number
Lutron/Maestro C-L	MACL-153MR
Lutron/Diva	DV-600P
Lutron	PD-6WCL
Leviton/Sureslide	6674
Leviton/Sureslide	6633-P
Leviton/Sureslide	6631
Legrand/Harmony	HCL453PTCCCV6

DIMENSIONS

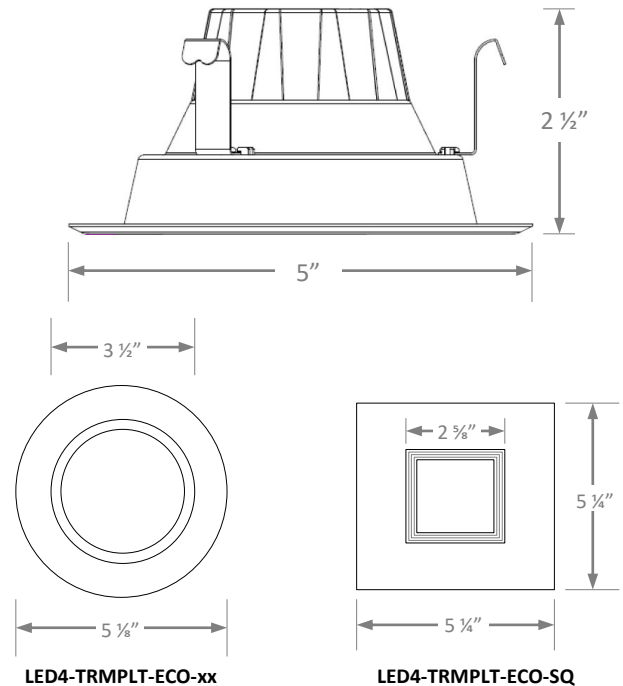

ORDERING INFORMATION

Example: BRK-4-BW-8L-4K

Series	Trim Type		Nominal Lumen Output		Color Temperature		Accessories (Order Separately)	
	BW	Baffle	8L	800 lumens	27K	2700k	LED4-TRMPLT-ECO-SQ	Square snap trim
BRK-4	BW	Baffle	8L	800 lumens	3K	3000k	LED4-TRMPLT-ECO-SPWHT	Specular white snap trim
					4K	4000k	LED4-TRMPLT-ECO-BK	Black snap trim
							LED4-TRMPLT-ECO-N	Nickle snap trim
						LED4-TRMPLT-ECO-BZ	Bronze snap trim	