# **BRK-LED4ICN** 4" LED Trims – Self Contained



Project:	
Type:	
Catalog #:	

#### STANDARD













## **FEATURES**

- Available in 2700K, 3000k, 3500K, 4000K, and 5000k color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output (L<sub>70</sub>) for 50,000 hours of operation.\*\*
- Provides 600 nominal lumens.
- 7 nominal watts.
- Color rendering index  $(R_a) > 80$ .
- 120 AC voltage (50-60Hz) is standard.
- Dimmable down to 10% with most line voltage dimmers.
- Thermoplastic construction.
- Easy installation in new construction or retrofit applications. Equipped with torsion springs.
- Rated for insulated, non-insulated, and air-tight applications.
- Type IC. Access above ceiling required.
- Compatible with 4.25" ceiling cut-outs.
- This device is not intended for use with emergency exits.

### **WARRANTY & LISTINGS**


- cETLus listed for wet locations.
- Energy Star qualified.
- Complies with FCC Part 15, class B.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.
- Contact factory for other color temperatures and lumen packages.  $L_{70}$  hours are IES TM-21-11 calculated hours.



# **COMPATIBLE DIMMERS**

MANUFACTURER & SERIES	PART NUMBER		
Lutron Maestro C-L	MACL-153MR		
Lutron Skylark C-L	SCL-153P		
Leviton Sureslide	6674		
Lutron	PD-6WCL		
Legrand Harmony	HCL453PTCCCV6		
Lutron Diva	DV600P		
Lutron Diva	DVCL-153P		

#### **DIMENSIONS**

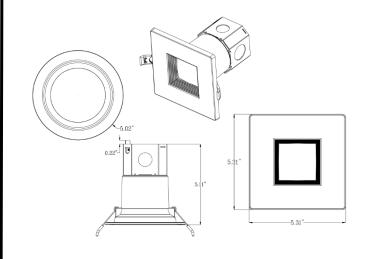

#### ORDERING INFORMATION

Example: BRK-LED4ICN-7W-27K-ECO Series		Watts	Color Temperature		Accessories (Order Separately)	
	BRK-LED4ICN	7W	27K-ECO 3K-ECO 35K-ECO 4K-ECO 5K-ECO	2700K 3000K 3500K 4000K 5000K	LED4-TRMPLT-ECO-SQ LED4-TRMPLT-ECO-SPWHT LED4-TRMPLT-ECO-BK LED4-TRMPLT-ECO-N LED4-TRMPLT-ECO-BZ	Square snap trim Specular white snap trim Black snap trim Nickle snap trim Bronze snap trim