

C091

Round Puff Ceiling Fixture



Features

Housing

Die-formed Cold-rolled Steel

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in (More Color Temperature Option – 3500K, 5000K)

Certifications

UL/cUL, ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Warranty on Driver and LED Module

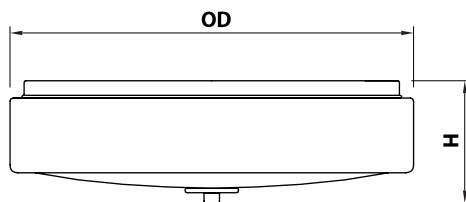

LED Type

Model	Input Voltage	Input Voltage	LED CT/ CRI	Lumen (Typ)	Dimension (OD X H)	Finish	Energy Star
C091D-3000K	120V ~ 277V	28W	3000K / 80	1960	16.0" x 4.6"	Acrylic, Opal	
C091D-4000K	120V ~ 277V	28W	4000K / 80	2100	16.0" x 4.6"	Acrylic, Opal	