

CKXTEU

ALL LED EXIT & EMERGENCY DIE-CAST ALUMINUM COMBO

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED Exit sign illumination.
- Two fully adjustable high performance premium grade, ultra bright white LED lamps.
- 3 watt (1 LED x 3 watts) per head.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 8.4V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Unique design provides spec grade EXIT sign with LED lamp heads in one low profile housing.
- Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Quick-snap face plate closure.
- Unique design allows double face conversion in the field.




OPTIONS

- RC: Remote capacity of up to 3.0 watts.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery proated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

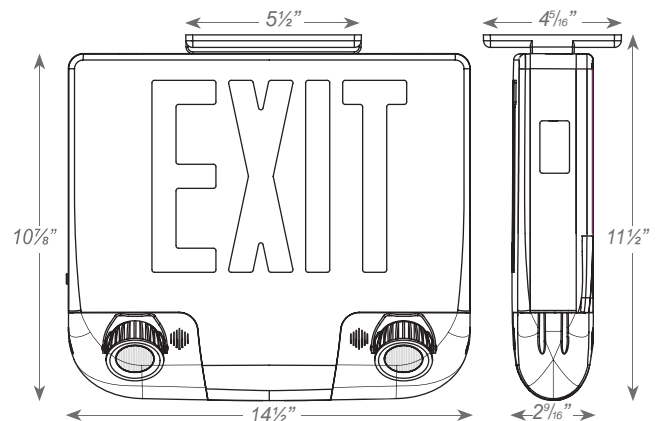

ORDERING INFORMATION

Sample Part Number: CKXTEU1RAAEM

Special voltage options available. Check with your Best Lighting Representative.

MODEL	No. of FACE	LETTER COLOR	HOUSING COLOR	FACE PANEL	BATTERY	OPTIONS
CKXTEU	1 Single Face	R Red	W White	W White	EM Battery Backup	RC Remote Capacity
	2 Double Face	G Green	B Black	B Black		
	3 Universal Single/Double Face		A Aluminum	A Aluminum		

CKXTEU

COMBOS