

General Description:

The NebuLite CPS Canopy Light is an architectural nice looking LED luminaire. Its unique Fresnel Lens offers glare-free wide beam spread that perfect for low ceiling parking structures.

Construction:

- Low profile architectural look
- Superior heat sinking with external Air-Flow fins
- IP65 for wet and damp locations

Mounting:

- Special J-box mount without opening the fixture
- 3/4" pendant mount

Electrical:

- High Power Factor, low THD UL listed driver with 10KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional
- FCC compliant
- 0-10V dimmable optional

Optical:

- Patented NEMA 7x7 wide beam Fresnel Lens

Controls:

- 0-10V dimming optional
- Concealed Bi-Level occupancy sensor

Warranty:

- 5 years warranty for complete fixture

Listings:

- UL
- DLC
- RoHs
- IP65



Specs:



Family Model	Lumens	Wattage	lm/W	CCT	CRI	PF	THD	Size	weight	L70
ACECP-45W	4,150lm	45W	95lm/W	4000K/5000K	80+	>0.95	<15%	10"x10"x2 7/8"	4.4lb	>100,000h
ACECP-70W	6,000lm	70W	86lm/W	4000K/5000K	80+	>0.95	<15%	10"x10"x2 7/8"	4.4lb	>100,000h



Order Info:

Family	Wattage	CCT	Color	Control	Volatge
CPS	45W=45W	50K=5000K	(omit)=Bronze, Std	(omit)=none	(omit)=120-277V, Std
=NebuLite Slim Canopy	70W=70W	40K=4000K	BL=Black	OCC=Occupancy Sensor	HV=347-480V
			SL=Silver	PCA=Button Photocell	
			GR=Gray		
			WH=White		

Photometrics:

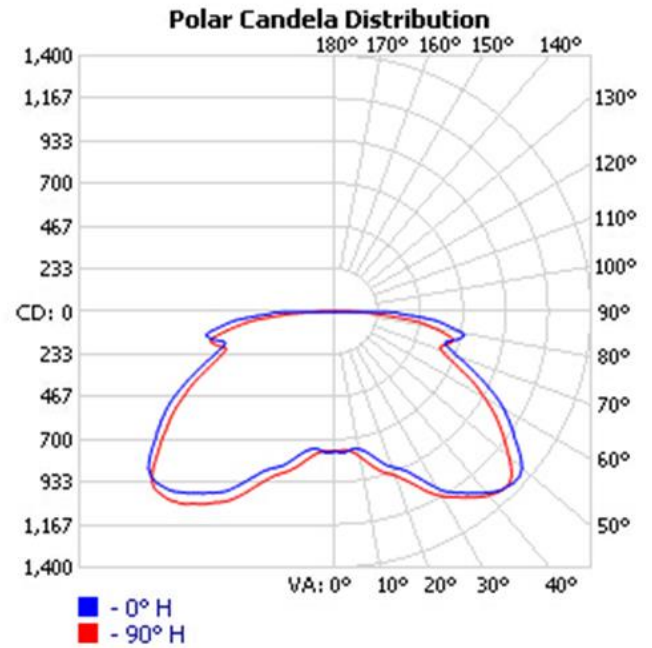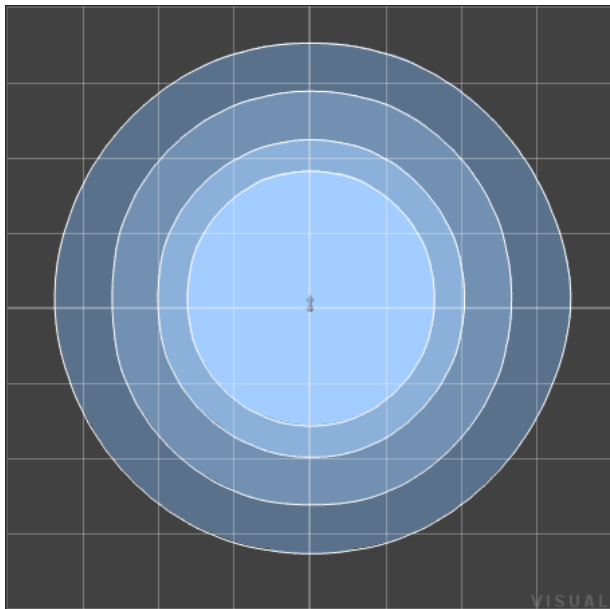

Sample Lighting Layout:

