



JOB NAME:

CAT#:

TYPE:

APPLICATIONS


The CPYSA provides exceptional glare control and wide distribution. This fixture is ideally suited for parking structures, storage areas, shopping area walkways, entryway, and low level security.

FEATURES & BENEFITS

- Sealed die-cast profile for indoor and outdoor applications
- Replaces 100W MH to 175W MH
- Optional bi-level motion sensor
- Ambient operating temperature -40°C to 45°C (-40°F to 113°F)
- ^cUL_{US} listed
- 5 year warranty



DIMENSIONS

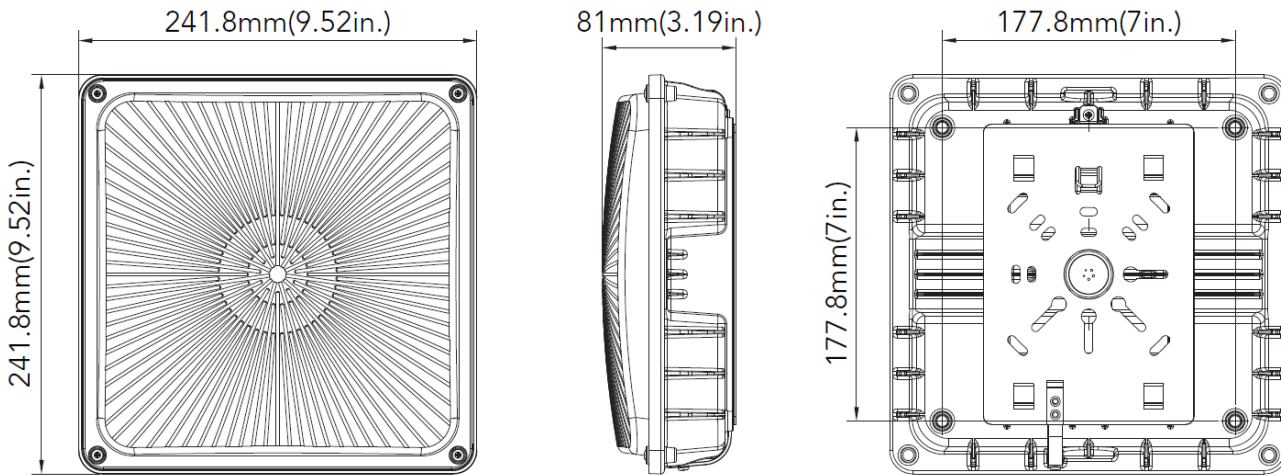

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:

TYPE:

DIMENSIONS

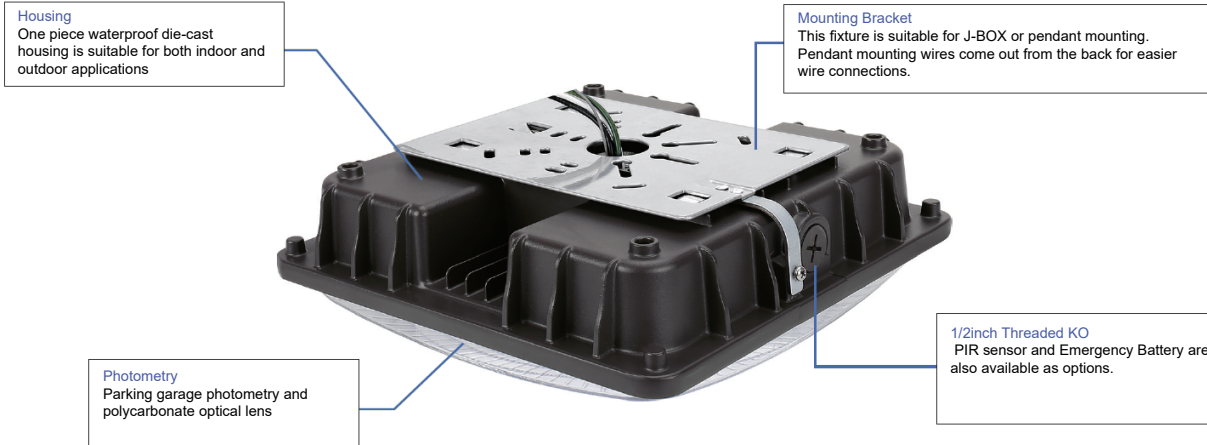

ORDERING

EXAMPLE: CPYSA 10 LED 40 DMV BZ 40 OS EM

CPYSA		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS ¹		5. DRIVER		6. FINISH ²		7. COLOR TEMP	
CPYSA	10 10 inches	LED	27	27 Watts 3800 Lumens	DMV	0-10V Dimming 120-277VAC Multivolt	BZ	Bronze	40	4000K ³
			40	40 Watts 5450 Lumens					50	5000K
			60	60 Watts 8000 Lumens	MV	120-277VAC				

8. SENSOR (O)⁴

OS Occupancy sensor⁵

9. EMERGENCY (O)⁴

EM 10 Watt 1300 Lumen
Battery Backup⁵

DLC Listed Fixtures			
Model Number	Color Temp	Options	DLC Listing
CPYSA10-LED27DMVBZxx	xx= 40,50	EM, OS	Premium
CPYSA10-LED27MVBZxx	xx= 40,50	EM, OS	Premium
CPYSA10-LED40DMVBZxx	xx= 40,50	EM, OS	Premium
CPYSA10-LED40MVBZxx	xx= 40,50	EM, OS	Premium



Notes:

- ¹Lumens at 5000K
- ²Consult for other options
- ³Special order only
- ⁴(O) is optional
- ⁵Shipped loose

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:

TYPE:

PHOTOMETRICS

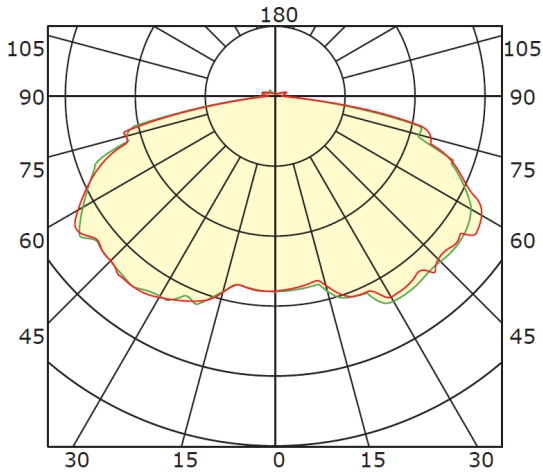

Dimensions and specifications subject to change without notice.

