

LED
TECHNOLOGY

50,000 Hours Life, 110Watt, 120-277VAC

Applications:

Commercial & Industrial High Bay Application

Features:

- Slim Design
- Non-Corrosive Powder Coated Steel Body
- Damp Location
- Steel Hanging Cable Included
- Dimmable down to 10%
- Accessories Sold Separately

Accessories:

Battery Backup




Add (BK) at end of model when ordering

Motion Sensor




Sold Separately HL-MS

Luminous Intensity Distribution Curve

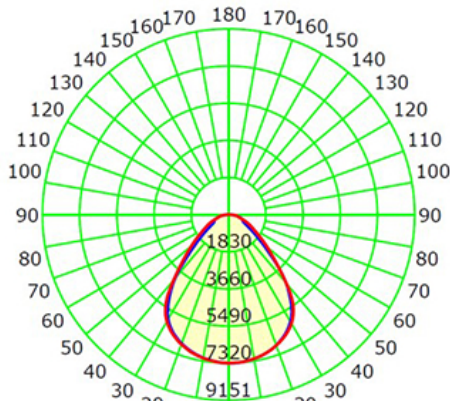

Unit: cd
Average Diffuse Angle(50%): 85.1°

24.8"

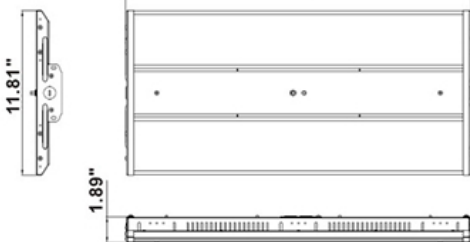

Specification:

Input Line Voltage:	120-277VAC
Input Power	110W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C
Maximum Operating Temp	40°C
CCT	5000K
CRI	≥80
Lumens	15,000
CBCP	7320
Power Factor	>0.90
THD	10%
Dimmable	10% 0~10V

DRIVER: Constant-current LED power supply.

Height	Avg./Nadir, E	Beam Angle:84.8°	Diameter / Area
1.0m	3689.75/ 7315.72lx		1.83m / 2.62sq.m
2.0m	922.44/ 1828.93lx		3.65m / 10.47sq.m
3.0m	409.97/ 812.86lx		5.48m / 23.55sq.m
4.0m	230.61/ 457.23lx		7.30m / 41.87sq.m
5.0m	147.59/ 292.63lx		9.13m / 65.42sq.m
6.0m	102.49/ 203.21lx		10.95m / 94.21sq.m
7.0m	75.30/ 149.30lx		12.78m / 128.23sq.m
8.0m	57.65/ 114.31lx		14.60m / 167.48sq.m
9.0m	45.55/ 90.32lx		16.43m / 211.97sq.m
10.0m	36.90/ 73.16lx		18.25m / 261.69sq.m

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

5-YEAR *

Model:#	Description	wattage	lumens
HL110S/850	110 Watt LED Linear High Bay 5000K	110W	15000

* 5 Year Limited Warranty

UPC: 80680215388-9

