

**LED**  
TECHNOLOGY

50,000 Hours Life, 135Watt, 120-277VAC

### Applications:


Commercial & Industrial High Bay Application

### Features:

- Slim Design
- Non-Corrosive Powder Coated Steel Body
- Damp Location
- Steel Hanging Cable Included
- Dimmable down to 10%
- Accessories Sold Separately

### Accessories:

#### Battery Backup





Add (BK) at end of model when ordering

#### Motion Sensor



Add (MS) at end fo model when ordering

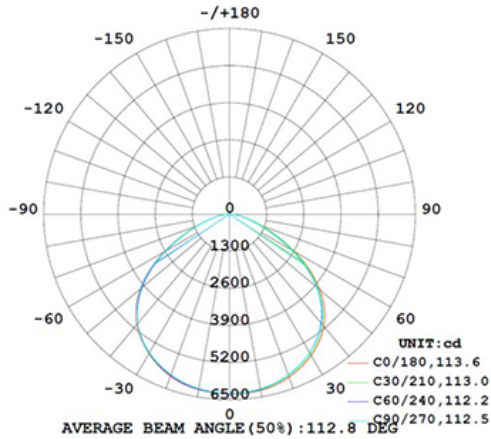

Weight: 7.71lb

### Specification:

Input Line Voltage:	120-277VAC
Input Power	135W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C
Maximum Operating Temp	40°C
CCT	5000K
CRI	≥80
Lumens	18,000
CBCP	7526
Power Factor	>0.90
THD	10%
Dimmable	10% 0~10V

DRIVER: Constant-current LED power supply.

Height	Eavg, Emax	Angle: 112.32deg	Diameter
4ft	118.22, 393.77fc		11.93ft
1.219m	1272, 4237lx		363.72cm
6.56ft	43.91, 146.28fc		19.58 ft
2m	472.5, 1574lx		596.66cm
9.84ft	19.52, 65.03fc		29.36 ft
3m	210.0, 699.7lx		894.98cm
13.12ft	10.98, 36.58fc		39.15 ft
4m	118.1, 393.6lx		1193.31cm
16.40ft	7.03, 23.41fc		48.94 ft
5m	75.61, 251.9lx		1491.64cm
19.68ft	4.88, 16.25fc		58.73 ft
6m	52.51, 174.9lx		1789.97cm
22.96ft	3.59, 11.94fc		68.51 ft
7m	38.58, 128.5lx		2088.29cm
26.24ft	2.74, 9.14fc		78.30 ft
8m	29.53, 98.40lx		2386.62cm
29.52ft	2.17, 7.23fc		88.09 ft
9m	23.34, 77.75lx		2684.95cm
32.80ft	1.76, 5.85fc		97.88 ft
10m	18.90, 62.98lx		2983.28cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**WARRANTY**

**5-YEAR \***

Model:#	Description	wattage	lumens
HL135I/850	135 Watt LED Linear High Bay 5000K	135W	18000

\* 5 Year Limited Warranty

UPC: 80680215584-5

Cyber Tech Lighting, Inc.  
 331 S. Hale Ave. Fullerton, CA 92831 USA.  
 Tel: 714-870-0794, 1-877-60CYBER Fax: 714-870-0795  
 www.cybertechlighting.com

