

## LED TECHNOLOGY

50,000 Hours Life, 120 Watt, 120-277VAC 50/60Hz

### Applications:


Pathway, Wall, Security, Walkways, and Perimeter Lighting.

### Features:

- Adjustable CCT 3000K, 4000K, and 5000K
- Photocell Included with Quick Disconnect
- 120/277 Dual Voltages
- Aluminum Rust Proof Body
- UL Certified Outdoor Wet Location
- Replaces 300W HID Unit
- Bronze, Powder Coat Finish
- Polycarbonate Lens with UV Stabilization





### Luminous Intensity Distribution Curve

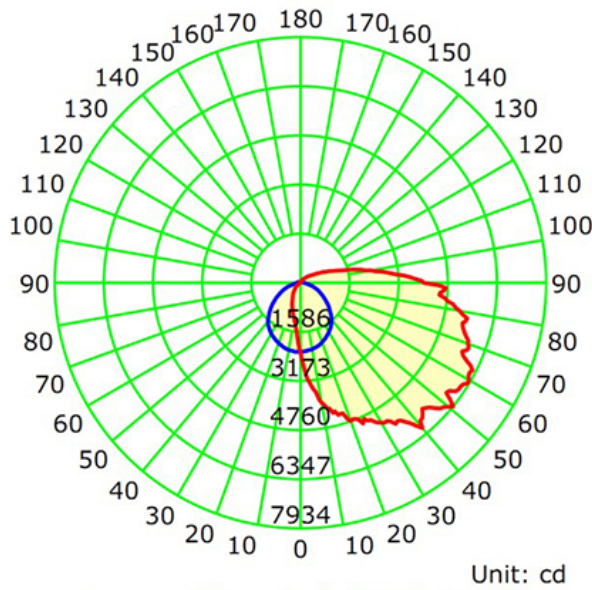

### Specification:

Input Line Voltage:	120-277VAC
Input Power	120W
Input Line Frequency	50/60Hz
Luminaire Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C/-40°F
Maximum Operating Temp	45°C/113°F
Adjustable CCT	3000K/4000K/5000K
CRI	≥80
Lumens	14400
Power Factor 120/277V	0.99/0.91
CBCP	6347
Dimmable	0-10V

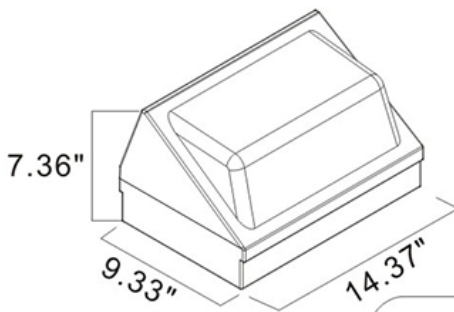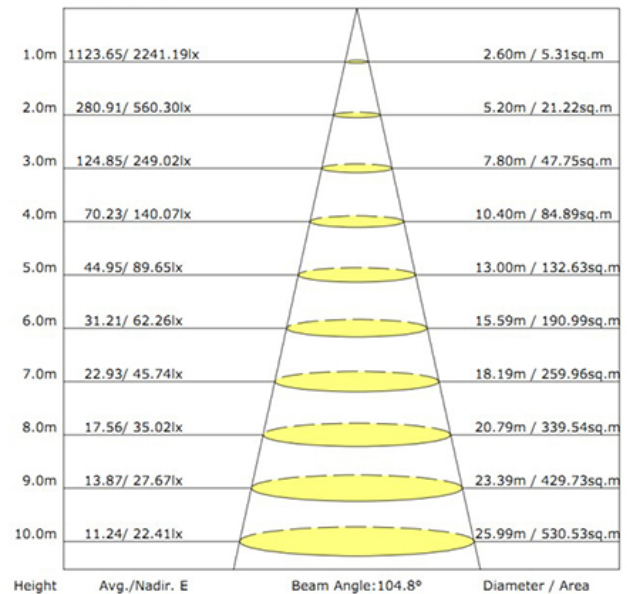

Model:#	Description	wattage	lumens
LWP120FHZ/CCT	120 Watt LED Wall Pack Bronze Body, Adjustable CCT	120W	14400

\*5 Year Limited Warranty

UPC: 680596-582939

