

LED TECHNOLOGY

50,000 Hours Life, 40 & 55 Watt, 120/277VAC 60Hz

Applications:

Parking Lots, Security Lighting, Ceiling Lighting

Features:

- 40W/55W LED Replaces a 150W/200W HID Unit
- Low Profile Design
- Aluminum Rust-Proof Body
- 120/277 Volt Input
- 0~10 Volt Dimmable
- Suitable For Wet Location




Accessories:

Motion Sensor
Add (MS) to end of model number

Battery Backup
Add (BK) to the end of model number




Additional Backup Housing
Total with unit 6.5" deep

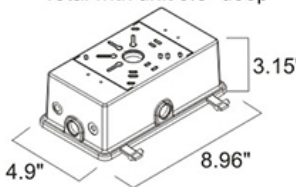

Specification:

Input Line Voltage:	120/277VAC
Input Power:	40W/55W
Input Line Frequency:	60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-20°C/-4°F
Maximum Operating Temp:	45°C/113°F
CCT:	5000K
CRI:	≥80
Lumens:	5300/7450
CBCP:	1353/1838

The Average Illuminance Effective Figure

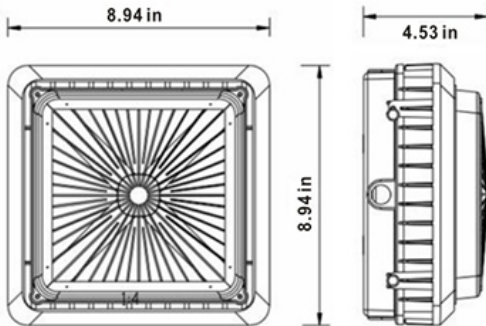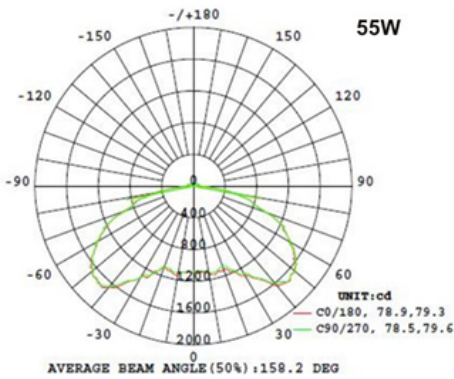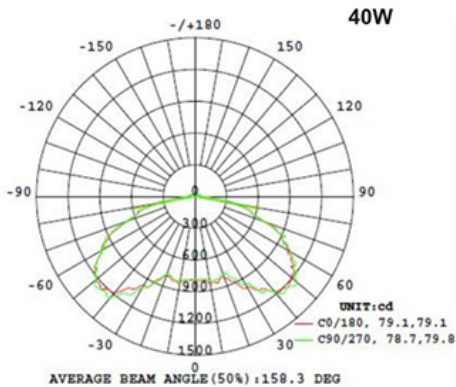

WARRANTY

* 5-YEAR

40W

Height	Avvg, Emax	Angle: 124.15deg	Diameter
3.281ft	28.97, 74.49fc		12.38ft
1m	311.8, 801.8lx		377.33cm
6.562ft	7.242, 18.62fc		24.76ft
2m	77.96, 200.4lx		754.65cm
9.843ft	3.219, 8.276fc		37.14ft
3m	34.65, 89.09lx		1131.98cm
13.12ft	1.811, 4.655fc		49.82ft
4m	19.49, 50.11lx		1509.31cm
16.4ft	1.159, 2.979fc		61.9ft
5m	12.47, 32.07lx		1886.64cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

55W

Height	Avvg, Emax	Angle: 125.16deg	Diameter
3.281ft	39.32, 102.3fc		12.7ft
1m	423.3, 1101lx		387.15cm
6.562ft	9.830, 25.57fc		25.4ft
2m	105.8, 275.2lx		774.30cm
9.843ft	4.369, 11.36fc		38.11ft
3m	47.03, 122.3lx		1161.46cm
13.12ft	2.458, 6.392fc		50.81ft
4m	26.45, 68.80lx		1548.61cm
16.4ft	1.573, 4.091fc		63.51ft
5m	16.93, 44.03lx		1935.76cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:#	Description	wattage	lumens
LWP40CPF-D/850	40Watt Low Profile LED Canopy Light Bronze Color, Day Light	40W	5300
LWP55CPF-D/850	55Watt Low Profile LED Canopy Light Bronze Color, Day Light	55W	7450

*Based on 3 hours usage a day

UPC: LWP40CPF-D/850 806802-153636
LWP55CPF-D/850 806802-153643

