CXES SERIES OUTDOOR LIGHTING

CXES-40-80W-MCTP-EM


SQUARE NEW CONCEPT GARAGE AND CEILING LIGHTS

EMERGENCY BACK UP BATTERY

Mari Power/Wattage (Selectable)







15 3/4"(L) X 15 3/4"(W) X 3 3/4"(H)

Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.

Features

- Stamped Galvanized Steel With Prismatic Polycarbonate Lens Redesigned For LED
- Designed for 9 to 16 Foot Mounting Heights

- Factory-Installed Options: Battery Backup, Motion Sensor
- 7-year Warranty

Technical Specifications

Electrical:

Wattage: 40W/60W/80WInput Current: 0.6A MAX

Input Voltage: 120-277VAC 50/60Hz

Power Factor: >0.90LPW: 130LPW

Mechanical:

- Stamped Galvanized Steel
- Twist-Lock Zhaga Socket Pre-Installed. See Motion Sensor Accessories
- Four 1/2" Threaded Hubs Located On Four Sides Of The Housing
- Prismatic Polycarbonate Lens
- Lifespan: 70000 Hrs
- Operating Temperature: -40°F ~ 104°F
- Suitable For Damp Locations
- 7-year Warranty

Emergency Battery Backup Spec:

- Output Power: 8W
- Output Voltage: 48V
- Li-Ion Battery / >90 Minutes Emergency Operation
- Test Button Installed on The Side of The Fixture

Lighting:

- MCTP:Multi-CCT and Power Switch Is In The Fixture
- Dimming: 0~10V Dimmable
- LED Type/ Brand: LUMILEDS 2835LED
- Total Lumens: 10400LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: 150° Lifespan: 70000 Hrs

Applications:

- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

Other Models:

30W | 3900LM | CXES-10-30W-MCTP-EM

60W | 7800LM | CXES-30-60W-MCTP-EM












Photometrics: CXES-40-80W-MCTP-EM

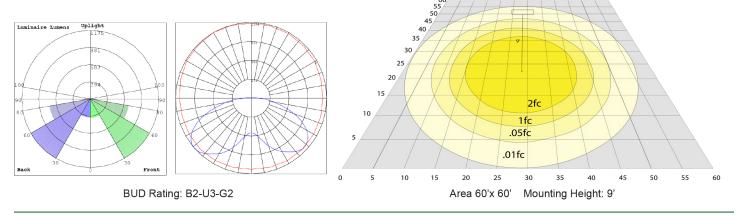

Other Views:



Performance Table: CXES-40-80W-MCTP-EM

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|---------------------|-------------------|----------|-----------------------------|-------------------------|------------|-----|
| CXES-40-80W-MCTP-EM | 40W 60W 80W | 120~277V | 5200LM 7850LM 10400LM | 3000K 4000K 5000K | B2-U3-G2 | 130 |

Sample Ordering

| Model | Min. | Max.Wa | Max.Wattage Color Temp. | | | |
|--------|------|--------------|-------------------------|------|---|----|
| CXES - | 40 | – 80W | _ | MCTP | - | EM |



