

# DC01x-2G-B Series / ECO1x-B Series

## Ceiling Fixture & Pendant



### Features

#### Housing

Die-formed Cold-rolled Steel and Epoxy Powder Coating  
 Finish Option: -62 Satin Nickel, -30 Oil Rubbed Bronze

#### Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity  
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

#### Electrical

High Power Factor, Low THD

#### Lamp


Built-in LED Module  
 MCT Type: Get Preferable Fixture Color Temperature by Slide Switch on LED Board  
 Color Temperature Option – 3000K, 3500K, 4000K

#### Certifications

ETL/cETL Listed, Energy Star

#### Warranty

5 Years Warranty on Driver and LED Module

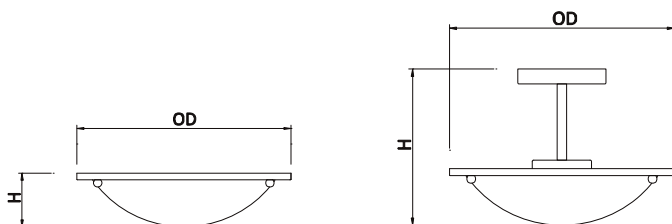

### LED Type

Model	Input Voltage	Input Voltage	CRI	Finish	Lumen (Typ)	Lumen (Typ) / CT	Dimension (OD X H)	Energy Star
DC012D-2G-B-xxxxK	120V	18W	> 80	-	1340	3000K/3500K/4000K/5000K	12.5" x 3.8"	Yes
DC014D-2G-B-xxxxK	120V ~ 277V	23W	> 80	-	2150	3000K/3500K/4000K/5000K	15.0" x 3.8"	Yes
DC016D-2G-B-xxxxK	120V ~ 277V	28W	> 80	-	2600	3000K/3500K/4000K/5000K	16.6" x 4.1"	Yes
DC018D-2G-B-xxxxK	120V ~ 277V	35W	> 80	-	3250	3000K/3500K/4000K/5000K	18.4" x 4.1"	Yes
ECO12D-B-62-xxxxK	120V	18W	> 80	Satin Nickel	960	3000K or 4000K	12.5" x 3.8"	---
ECO14D-MCT-B-62	120V	25W	> 80	Satin Nickel	1550	3000K, 3500K, 4000K	15.0" x 3.8"	---
ECO16D-MCT-B-62	120V	25W	> 80	Satin Nickel	1550	3000K, 3500K, 4000K	16.6" x 4.1"	---
ECO14D-MCT-B-62	120V	32W	> 80	Satin Nickel	1700	3000K, 3500K, 4000K	18.4" x 3.8"	---

-PD: Available Pendant Model for ECO Series

### Pendant LED Type

Model	Input Voltage	Input Voltage	CRI	Lumen (Typ) / CT	Dimension (OD X H)	Energy Star
DC012D-2G-B-PD-xxxxK	120V	18W	> 80	1340 / 3000K	12.5" x 10.8"	Yes
DC014D-2G-B-PD-xxxxK	120V ~ 277V	23W	> 80	2150 / 3000K	15.0" x 10.8"	Yes
DC016D-2G-B-PD-xxxxK	120V ~ 277V	28W	> 80	2600 / 3000K	16.6" x 11.1"	Yes
DC018D-2G-B-PD-xxxxK	120V ~ 277V	35W	> 80	3250 / 3000K	18.4" x 11.1"	Yes