

Features

Housing

Die-formed Cold-rolled Steel
 Finish Option: -62 Satin Nickel, -01 Polish Brass, -06 White, -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity

Electrical

High Power Factor, Low THD

Built-in Emergency Lighting

Bi-level Lighting

Lamp

Built-in LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light.


Color Temperature Option – 3000K, 3500K, 4000K, 5000K

Certifications

ETL/cETL Listed, Energy Star

Warranty

5 Years Warranty on Driver and LED Module

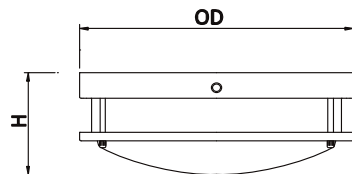

Without Emergency Backup and Bi-level Lights

Model	Input Voltage	Input Wattage	CRI	Lumen (TYP) / CT	Dimension (OD X H)	Energy Star
DC012D-2G-D-xxxxK	120V	18W	> 80	1430 / 3000K	11.8" x 5.0"	Yes
DC014D-2G-D-xxxxK	120V ~ 277V	23W	> 80	2267 / 3000K	14.6" x 5.7"	Yes
DC016D-2G-D-xxxxK	120V ~ 277V	28W	> 80	2600 / 3000K	16.0" x 5.9"	Yes
DC018D-2G-D-xxxxK	120V ~ 277V	35W	> 80	3364 / 3000K	17.7" x 5.9"	Yes

Emergency Backup Models

Model	Input Voltage	Input Wattage	CRI	Lumen (TYP) / CT	Dimension (OD X H)	Energy Star
DC012D-2G-D-xxxxK-EM	120V	18W	> 80	1430 / 3000K	11.8" x 5.0"	Yes
DC014D-2G-D-xxxxK-EM	120V ~ 277V	23W	> 80	2267 / 3000K	14.6" x 5.7"	Yes
DC016D-2G-D-xxxxK-EM	120V ~ 277V	28W	> 80	2600 / 3000K	16.0" x 5.9"	Yes
DC018D-2G-D-xxxxK-EM	120V ~ 277V	35W	> 80	3364 / 3000K	17.7" x 5.9"	Yes

Bi-level Lights with Built-in High Frequency Sensor

Model	Input Voltage	Input Wattage	CRI	Lumen (TYP) / CT	Dimension (OD X H)	Energy Star
DC012D-2G-D-xxxxK-BI	120V	18W	> 80	1430 / 3000K	11.8" x 5.0"	Yes
DC014D-2G-D-xxxxK-BI	120V ~ 277V	23W	> 80	2267 / 3000K	14.6" x 5.7"	Yes
DC016D-2G-D-xxxxK-BI	120V ~ 277V	28W	> 80	2600 / 3000K	16.0" x 5.9"	Yes
DC018D-2G-D-xxxxK-BI	120V ~ 277V	35W	> 80	3364 / 3000K	17.7" x 5.9"	Yes

DC012-2G-D_DC014-2G-D_DC016D-2G-D_DC018-2G-D
Ceiling Fixture



Bi-level Lights with Emergency Backup

Model	Input Voltage	Input Wattage	CRI	Lumen (TYP) / CT	Dimension (OD X H)	Energy Star
DC012D-2G-D-xxxxK-EM-BI	120V	18W	> 80	1430 / 3000K	11.8" x 5.0"	Yes
DC014D-2G-D-xxxxK-EM-BI	120V ~ 277V	23W	> 80	2267 / 3000K	14.6" x 5.7"	Yes
DC016D-2G-D-xxxxK-EM-BI	120V ~ 277V	28W	> 80	2600 / 3000K	16.0" x 5.9"	Yes
DC018D-2G-D-xxxxK-EM-BI	120V ~ 277V	35W	> 80	3364 / 3000K	17.7" x 5.9"	Yes