

DC018-2G-C

Ceiling Fixture & Pendant



Features

Housing

Die-formed Cold-rolled Steel and Epoxy Powder Coating
 Finish Option: -62 Satin Nickel, -01 Polish Brass, -06 White, -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in (More Color Temperature Option – 3500K, 5000K)
 GU24 CFL Bulbs (More Color Temperature Option – 2700K, 4000K)

Certifications

UL/cUL, ETL/cETL Listed

Warranty

5 Years Warranty on Driver and LED Module

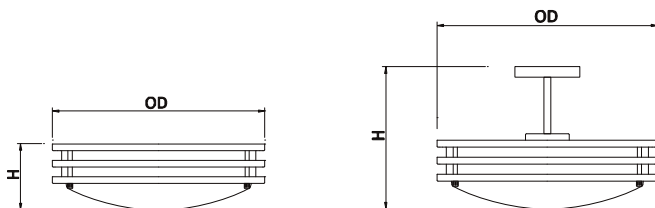

LED Type

Model	Input Voltage	Input Voltage	LED CT	CRI	Lumen (Typ)	Dimension (OD X H)	Energy Star
DC018D-2G-C-3000K	120V ~ 277V	35W	3000K	> 80	2800	17.8" x 5.0"	Yes
DC018D-2G-C-4100K	120V ~ 277V	35W	4100K	> 80	2900	17.8" x 5.0"	Yes
DC018D-2G-C-PD-3000K	120V ~ 277V	35W	3000K	> 80	2800	17.8" x 12.0"	Yes
DC018D-2G-C-PD-4100K	120V ~ 277V	35W	4100K	> 80	2900	17.8" x 12.0"	Yes

GU24 CFL Type

Model	Input Voltage	Finish	Shade	Lamp	Dimension (OD X H)	Energy Star
DC018PG-C-318-xxxxK	120V	Satin Nickel	Acrylic	3 x 18W GU24	17.8" x 4.5"	
DC018PG-C-PD-318-xxxxK	120V	Satin Nickel	Acrylic	3 x 18W GU24	17.8" x 11.5"	