

# DC814-A DC818-A

## Ceiling Fixture & Pendant



### Features

#### Housing

Die-formed Cold-rolled Steel  
 Inner Shade: Off White Decorative Fibre Linen  
 Outer Shade: Semi-clear Silver Decorative Fibre Linen

#### Optical

Shade: High Transmission Acrylic Front Panel Create Excellent Light Distribution and Uniformity  
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light.

#### Lamp


LED Type: Built-in (Color Temperature Option – 3500K, 5000K)  
 CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

#### Certification

UL/cUL, ETL/cETL Listed

#### Warranty

5 Years Warranty on Driver and LED Module

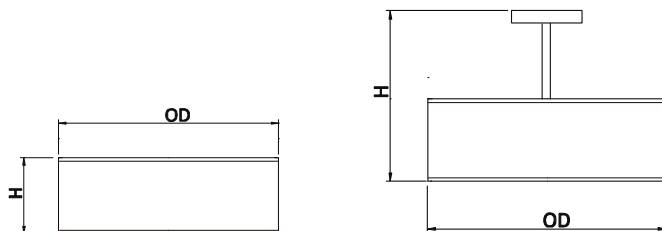

### LED Type

Model	Input Voltage	Input Wattage	LED CT / CRI	Lumen (TYP)	Dimension (OD X H)	Finish
DC814D-A-3000K	120V ~ 277V	24W	3000K / 80	1550	17.5" x 5.5"	Acrylic / Linen
DC814D-A-4000K	120V ~ 277V	24W	4000K / 80	1640	17.5" x 5.5"	Acrylic / Linen
DC818D-A-3000K	120V ~ 277V	35W	3000K / 80	2210	20.8" x 6.1"	Acrylic / Linen
DC818D-A-4000K	120V ~ 277V	35W	4000K / 80	2250	20.8" x 6.1"	Acrylic / Linen
DC814D-A-PD-3000K	120V ~ 277V	24W	3000K / 80	1550	17.5" x 12.5"	Acrylic / Linen
DC814D-A-PD-4000K	120V ~ 277V	24W	4000K / 80	1640	17.5" x 12.5"	Acrylic / Linen
DC818D-A-PD-3000K	120V ~ 277V	35W	3000K / 80	2210	20.8" x 13.1"	Acrylic / Linen
DC818D-A-PD-4000K	120V ~ 277V	35W	4000K / 80	2250	20.8" x 13.1"	Acrylic / Linen

### CFL Type

Model	Input Voltage	Finish	Shade	Lamp	Dimension (OD x H)
DC814PG-A-218	120V	36W	Acrylic / Linen	2 x 18W GU24	17.5" x 5.5"
DC818PG-A-318	120V	54W	Acrylic / Linen	3 x 18W GU24	20.8" x 6.1"
DC814PG-A-PD-218	120V	36W	Acrylic / Linen	2 x 18W GU24	17.5" x 12.5"
DC818PG-A-PD-318	120V	54W	Acrylic / Linen	3 x 18W GU24	20.8" x 13.1"