

DC012D-2G(JA8) DC014D-2G(JA8) DC016D-2G(JA8)

Ceiling Fixture, CEC Listed



Features

Housing

Die-formed Cold-rolled Steel
 Finish Option: -62 Satin Nickel, -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity

Electrical

LED Driver: 120V Triac Dimming Type or 120V ~ 277V, 0 ~ 10V Dimming Type
 Min. Dimming Level: 3%
 High Power Factor (> 0.98), Low THD (< 10%)

Lamp


LED Type: Built-in
 LM80, TM21 : 60,000 hours Rating
 LED CRI > 90 per JA8 Standard
 Flicker Free: Meets JA10 Standard

Certifications

ETL/cETL Listed, CEC Listed Meets T24 JA8

Warranty

5 Years Warranty on Driver and LED Module

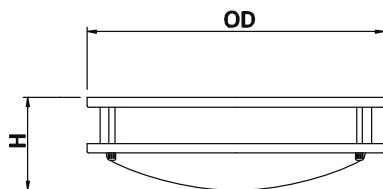

LED Type

Model	Input Voltage	Input Wattage	LED CT / CRI	Lumen (TYP)	CRI	Dimming	Finish	Dimension (OD X H)	Energy Star
DC010D-2G-11W(JA8)	120V	11W	3000K	850	>90	TRIAC	Satin Nickel	10.4" x 4.2"	---
DC010D-2G (JA8)	120V	18W	3000K	1200	>90	TRIAC	Satin Nickel	10.4" x 4.6"	---
DC012D-2G (JA8)	120V	18W	3000K	1310	>90	TRIAC	Satin Nickel	11.8" x 4.2"	---
DC014D-2G (JA8)	120V-277V	24W	3000K	2000	>90	0-10V	Satin Nickel	14.5" x 4.6"	---
DC016D-2G (JA8)	120V-277V	30W	3000K	2300	>90	0-10V	Satin Nickel	16.0" x 4.9"	---
DC018D-2G (JA8)	120V-277V	35W	3000K	3000	>90	0-10V	Satin Nickel	17.8" x 4.9"	---