

# DC612 DC614 DC618

## Ceiling Fixture & Pendant



### Features

#### Housing

Die-formed Cold-rolled Steel  
Side Shade: Semi-clear White Decorative Fibre Linen

#### Optical

Shade: High Transmission Acrylic Front Panel Create Excellent Light Distribution and Uniformity  
LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light.

#### Electrical

High Power Factor, Low THD

#### Lamp


LED Type: Built-in (Color Temperature Option – 3000K, 3500K, 4000K, 5000K)  
CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

#### Certification

UL/cUL, ETL/cETL Listed

#### Warranty

5 Years Warranty on LED Driver and LED Module

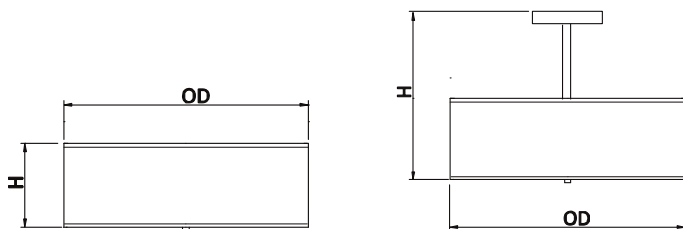

### LED Type

Model	Input Voltage	Input wattage	LED CT / CRI	Lumen (TYP)	Dimension (OD x H)	Shade
DC612D-xxxxK	120V ~ 277V	18W	3000K / >80	1200	12.0" x 5.0"	Acrylic / Linen
DC614D-xxxxK	120V ~ 277V	24W	3000K / >80	1830	15.4" x 5.2"	Acrylic / Linen
DC618D-xxxxK	120V ~ 277V	35W	3000K / >80	2940	18.5" x 5.7"	Acrylic / Linen
DC614D-PD-xxxxK	120V ~ 277V	24W	3000K / >80	1830	15.4" x 12.2"	Acrylic / Linen
DC618D-PD-xxxxK	120V ~ 277V	35W	3000K / >80	2940	18.5" x 12.7"	Acrylic / Linen

### CFL Type

Model	Input Voltage	Input Wattage	Shade	Lamp	Dimension (OD x H)
DC614PG-218	120V	36W	Acrylic / Linen	2 x 18W GU24	15.4" x 5.2"
DC618PG-318	120V	54W	Acrylic / Linen	3 x 18W GU24	18.5" x 5.7"
DC614PG-PD-218	120V	36W	Acrylic / Linen	2 x 18W GU24	15.4" x 12.2"
DC618PG-PD-318	120V	54W	Acrylic / Linen	3 x 18W GU24	18.5" x 12.7"