

W198D

Wall Sconce



Features

Housing

Die-formed Cold-rolled Steel
Finish Option: -62 Satin Nickel -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Acrylic Creates Excellent Light Distribution and Uniformity
LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


Integrate LED Module , Color Temperature Option 3000K, 3500K, 4000K, 5000K

Certification

ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Limited Warranty on Driver and LED

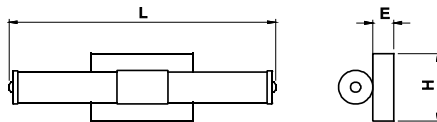

LED Type

Model	Input Voltage	Input Wattage	LED CT	CRI	Lumen (TYP)	Finish/Shade	Dimension (L x H x E)	Energy Star
W198D-xxxxK	120V-277V	15W	3000K	>80	1100	Satin Nickel / Acrylic	18.7" x 4.7" x 3.7"	Yes