



Engineered economy is what our E3EA series of A19 Eco bulbs are designed from. This no-frills workhorse bulb delivers lumens while sipping on only 6 and 9 watts of power, providing the light you need while using as little electricity as possible! These budget powerhouse bulbs can be installed where basic light is needed.

Features

- No UV or IR radiation
- Elegant and efficient design
- Mercury-free construction
- Uniform illumination light profile

Applications

- General Lighting
- Damp Location Installation
- Ambient Lighting



Please visit www.energeticlighting.com for Lighting Facts label and other up-to-date information.

Other color temperatures may be available by special request.


Specifications

	E3EA06A-730	E3EA09A-730
Model:	E3EA06A-730	E3EA09A-730
Base Type:	E26	E26
Lumen Output:	450 lm	750 lm
Luminous Efficacy:	82 lm/W	83 lm/W
Beam Angle:	220°	220°
Equivalent Incandescent Wattage:	40 W	60 W
Input Power:	5.5 W	9 W
Input Voltage:	120 Vac	120 Vac
Power Factor:	>50%	>50%
Color Temperature (CCT):	3000 K	3000 K
Color Rendering Index (CRI):	≥75	≥75
Lifetime:	10000 hours	10000 hours
Warranty:	2 Years	2 Years
Dimmable:	No	No
Operating Temperature:	-4°F to 113°F	-4°F to 113°F
Environment:	Damp Rated	Damp Rated
Suitable for Totally Enclosed Install:	Yes	Yes
Weight:	0.3 lbs	0.3 lbs
Dimensions:	4.25in. (L) x 2.36in. (d)	4.25in. (L) x 2.36in. (d)
Energy Star:	No	No

Model numbers contain an alphanumeric suffix code to designate packaging quantity, such as "-VB", "-V2", etc.

Photometric Data

Polar Distribution Chart
(units in Candela - cd)

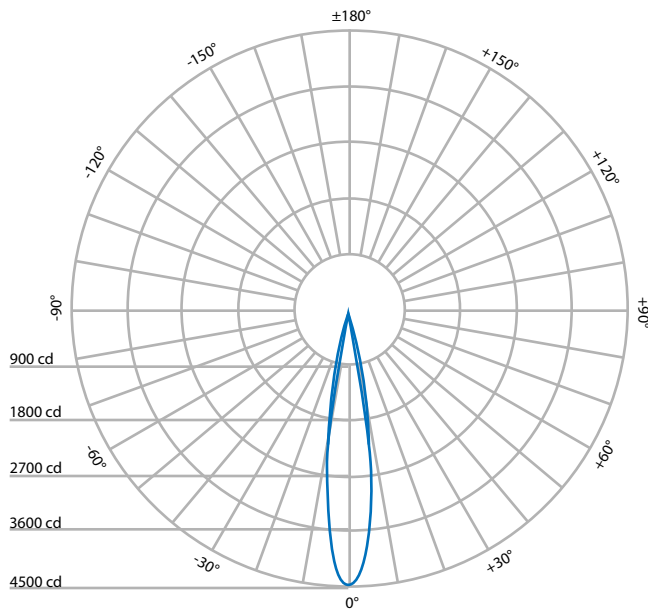

Illuminance Data

Illumination Eavg, Emax	Diameter	Distance
300.40, 408.70 fc (3233, 4399 lux)	0.9742 ft (29.69 cm)	3.281 ft (1m)
75.09, 102.20 fc (808, 1100 lux)	1.948 ft (59.38 cm)	6.562 ft (2m)
33.37, 45.41 fc (359, 489 lux)	2.923 ft (89.09 cm)	9.843 ft (3m)
18.77, 25.54 fc (202, 275 lux)	3.897 ft (118.78 cm)	13.12 ft (4m)
12.01, 16.35 fc (129, 176 lux)	4.871 ft (148.47 cm)	16.4 ft (5m)

Beam angle: 15°

Zonal Lumen Summary

Zone	Lumens	%Total
0-20	488.26	82.3%
0-30	540.68	91.1%
0-40	561.17	94.6%
0-60	584.12	98.4%
0-90	593.50	100.0%
0-180	593.50	100.0%

Dimensions

