

Residential Grade 2-Gang Floor Box Assembly with 20A Duplex T&WR Receptacle Screw Cover Type



975510-C



975510-SS



975510-C-D



975510-SS-D

Model No.: 975510-X/975510-X-D *X refers to color code.

Description: The 2-Gang Floor Box Assembly Duplex Tamper & Weather Resistant Screw Cover Type is used for carpet and wood floors. Covers can be unscrewed, providing easy access to power and can be closed when not in use. Kit assembly includes a metal floor box, a duplex T&WR receptacle and/or Datacom and a cover.


Features:

- Two 20A 125V Duplex Tamper & Weather Resistant Receptacles or one 20A 125V Duplex Tamper & Weather Resistant Receptacle and one data port.
- For use with carpet and wood floors.
- Steel floor box must be flush with the wood sub-floor prior to final installation.
- Easy connection wiring accepts #12-10 AWG stranded and solid copper wire.

Testing & Code Compliance:

- Compliance with 2011 NEC Article 406.12 for tamper-resistant receptacles.
- Compliance with 2011 NEC Article 314.27 for floor boxes.
- All tamper resistant receptacles are UL listed.
- UL listed.

Dimensions:

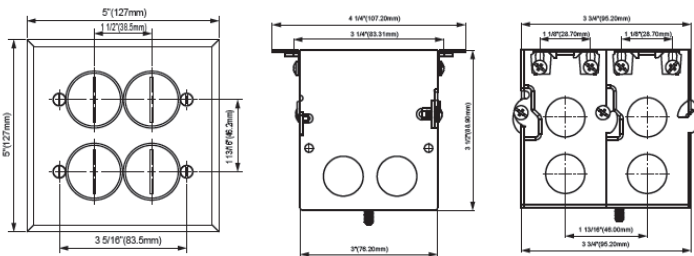

Specifications:

Cover MaterialBrass(C) or Stainless Steel (SS)
 Cover Type Screw
 Cover size..... 5" (127mm) x 5" (127mm)
 Receptacle Rating: 20A 125VAC
 Box:
 Box Type FB-07 Two 1-Gang Box (3"x3-1/2"x3-3/4")
 Box Material..... Pre-Galvanized Steel
 Knockout Size.....1/2"
 Adjustable Height Up to 1" depth
 Warranty..... 2 Years

Cat.No.	Box Type	Receptacle/D atacom	Cover Type	Finish
975510-C	FB-07 Two 1-Gang Box (3"(76.20mm) x 3- 1/2"(88.90mm) x 3- 3/4"(95.20mm))	62040-TWR-W Two Duplex T&WR Receptacles	Screw	Brass
975510-SS				Stainless Steel
975510-C-D		62040-TWR-W Duplex T&WR Receptacle and 6500-W Data Port		Brass
975510-SS-D				Stainless Steel

Testing & Code Compliance



Enerlites Inc.

www.enerlites.com

Phone: 949-756-0536 Fax: 949-756-0528 e-mail: sales@enerlites.com

Version 2.0
Date: 10/14/2015