





Commercial Grade Occupancy/Vacancy Sensor

Model No: MWOS

Description

This Multi-Technology Wall Switch Sensor combine advanced passive infrared (PIR) and ultrasonic technologies into one unit. The combined technologies helps eliminate false triggering even in difficult applications. Selectable operating modes allow the sensor to turn a load on, and hold it on as long as either or both technologies detect occupancy. After no movement is detected for the selected time delay, the lights switch off. A "walk-through" mode can turn lights off after only 3 minutes, if no activity is detected after 30 seconds following an occupancy detection.

This sensor also contains a light level sensor. If adequate daylight is present, the sensor holds the load OFF until light levels drop, even if the area is occupied.

Features

- Integrated PIR and Ultrasonic sensor technology to detect very fine motion and provide accurate motion sensing
- Allows to choose triggering when both technologies detect motion or when only PIR detects motion
- Less false trigger, fast ON/OFF; commercial grade sensor for closet, garage, hotels, meeting room, work places
- Adjustable timeout from 15 seconds to 30 minutes; Walk-Through mode: 3 minutes if no activity after first 30 seconds

Specifications


120/277VAC,50/60Hz
800W-120VAC,50/60Hz
800VA-120VAC
1600VA-277VAC
50/60Hz
800W-120VAC,50/60Hz
1/4HP-120VAC,50/60Hz
5 Sec to 30 Mins
3 minutes
if no activity after 30 sec.
_ 5 sec. at initial power up
or DIP switch reset
High or Low (DIP switch)
Minimum
to Maximum (trimpot)
100 Lux - daylight(trimpot)
32°F-131°F

Testing & Code Compliance





Coverage area Wiring

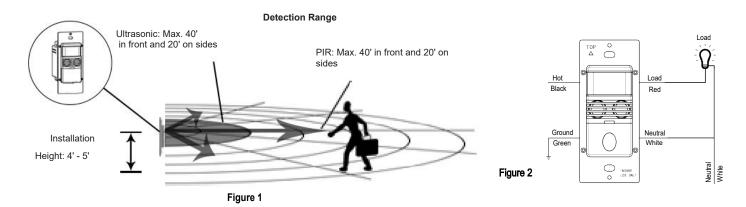

Adjustment

