

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, recessed perimeter elliptical wall wash to highlight wall and shelf mounted goods in commercial and retail environments. Provides uniform VERTICAL surface lighting.

SIZE W x L x H in inches

- 10.62"W x 24"L x 4.5"D - 10.62"W x 48.0"L x 4.5"D

MOUNTING

Recessed inverted T-Bar ceilings. Grid mount.

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Access plate with wiring knockouts are provided on one side of housing. Ballast is accessed from side, through adjacent ceiling tile. Premium, full specular reflectors at sides and ends create a professional finish and control the wall wash lighting distribution.

- · Perimeter highlight for wall and shelf mounted goods.
- · 'Silver' full bright reflectors maximize efficiency, light output, and control wall wash distribution.
- · Access plate to simplify installation

ORDERING INFORMATION






Whips, fuses, and frame kits. Contact factory for more details.

ELECTRICAL SPECIFICATIONS -CRI : >80

-Service Life : >60,000 hours -Dimming: dimming down to 10% on 0-10V dimmer -Input Voltage: 120V-277V 50/60Hz -Ambient Operating Temperature: -30C to 50C



Example: EWW24LH24W2550LDMV40K

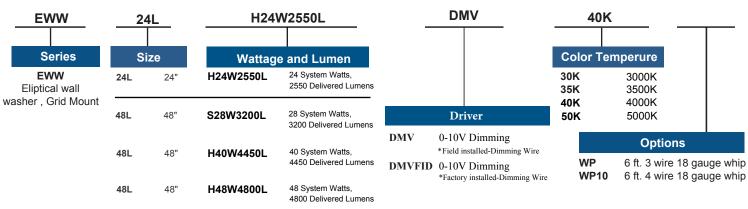

Catalog Number:
Notes:

<u>HIGH OUTPUT</u>










DIMENSIONS

All dimensions are inches (millimeters). Specifications subject to change without notice.

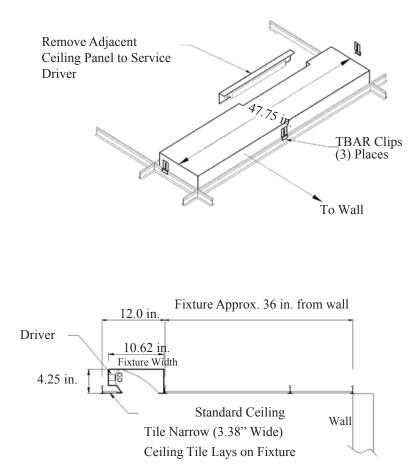

Catalog Number:	
Notes:	