



Project Name:

Type:

Catalog#:

The ACR is a traditional Acorn post top area light fixture that built with EX-LITE's most advanced LED light engine and lighting control technologies. It offers historical light fixture styling combined with modern energy saving & reliability.

Ordering SKU:

Model	Wattage	CCT	Control	Color	Voltage
ACR	25W=25W	30K=3000K	(blank)=none, Std	(blank)=Bronze, Std	(blank)=120/277VAC, Std
=Acorn Post Top	40W=40W	40K=4000K	PCB=Button Photocell	BL=Black	HV=347/480VAC
	60W=60W	50K=5000K		WH=White	
	80W=80W			GR=Gray	

Specs:

Family Model	Wattage	Lumens	lm/W	CCT	CRI
ACR-25W	25W	3,000lm	120lm/W	3000K/4000K/5000K	80+
ACR-40W	40W	4,800lm	120lm/W	3000K/4000K/5000K	80+
ACR-60W	60W	7,200lm	120lm/W	3000K/4000K/5000K	80+
ACR-80W	80W	9,600lm	120lm/W	3000K/4000K/5000K	80+

Features & Specs

Construction:

- Die cast aluminum housing.
- Stylish historical design.
- IP65 for wet and damp locations.

Mounting:

- Post top mount to fit 2 3/8" & 3" round pole.
- Need tenon adapter for square poles.

Electrical:

- High Power Factor, low THD UL listed driver with 5KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional.

Optical:

- Standard wide beam Type V
- Glare-free and unbreakable Polycarbonate lens

Controls Options:

- Button photocell
- CASAMBI intelligent control

Warranty:


- 5 years warranty for complete fixture.

Listings:


ETL
DLC Pending
RoHs
IP65




Photometrics (MH=20' grid):



40W@20FT




60W@20FT



80W@20FT

0.1	fc
0.2	fc
0.5	fc
1	fc
MH	20

Polar Distribution

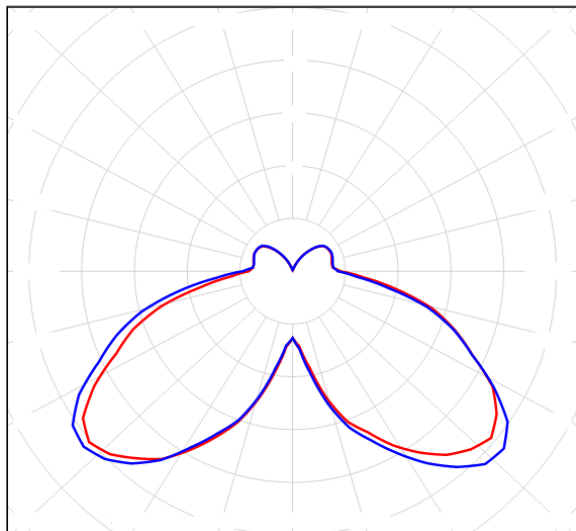

Dimensions (one size):

