



### General Description:

The EX-LITE DDAL is an architectural decorative dome shape area light fixture that built with our industry-leading high performance LED light engine.

### Construction:

- Stylish decorative look.
- Heavy-gauge spun aluminum housing.
- Corrosion resistant polyester powder coat finish, available in many finish colors.

### Mounting:

- Pole mount, wall mount & post-top mount.

### Electrical:

- High Power Factor, low THD UL listed driver with 10KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional
- FCC compliant
- 0-10V dimmable optional

### Optical:

- IES Type III, Type IV and Type V distribution patterns
- Optics are interchangeable and easily replaceable
- Full range CCT from 3000K to 5000K

### Controls:

- NEMA twist lock photocontrol and receptacle
- Bi-Level occupancy sensor with wireless App control

### Working Temperature:

- Up to 140F

### Warranty:

- 10 years' warranty for complete fixture

### Listings:

DLC Pending  
RoHs  
IP65

### Ordering Information:

Family Model	Wattage	CCT	Optic	Finish Color	Control	Mounting	Input Voltage
DDAL	50W=50W	50K=5000K	(blank)=Type IV, Std	(blank)=Bronze, Std	(blank)=none, Std	ARM1=Square Pole Mount	(blank)=120-277V, Std
	80W=80W	40K=4000K	T3=Type III	BL=Black	OCC=Bi-level motion/ambient sensor	ARM2=Square Pole Mount	HV=347-480V
	100W=100W	30K=3000K	T5=Type V	WH=White	PCN=NEMA Photocell	WM=Wall Mount	
	120W=120W			GR=Gray		PTM=Post Top Mount	
	150W=150W			CC=Custom Color			
	200W=200W						

PROJECT NAME: \_\_\_\_\_ CATALOG NUMBER: \_\_\_\_\_


NOTES: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_

# Dome LED Area Light


**Specs:**

Family Model	Wattage	Lumens	lm/W	CCT	CRI
DDAL-50W	50W	8,000lm	160lm/W	3000K/4000K/5000K	75+
DDAL-80W	80W	12,800lm	160lm/W	3000K/4000K/5000K	75+
DDAL-100W	100W	16,000lm	160lm/W	3000K/4000K/5000K	75+
DDAL-120W	120W	19,200lm	160lm/W	3000K/4000K/5000K	75+
DDAL-150W	150W	24,000lm	160lm/W	3000K/4000K/5000K	75+
DDAL-200W	200W	32,000lm	160lm/W	3000K/4000K/5000K	75+


**Photometrics:**



**Type III**




**Type IV**




**Type V**


**Mounting Options:**



**Arm Mount**



**Wall Mount**



**Post Top Mount**


**MOUNTING CONFIGURATION**



Wall




Arm1




Arm1




Arm1



Arm2




Arm1




Arm1

# Dome LED Area Light

Dimensions:

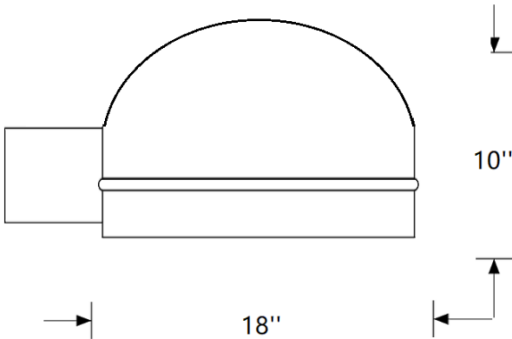

One Size

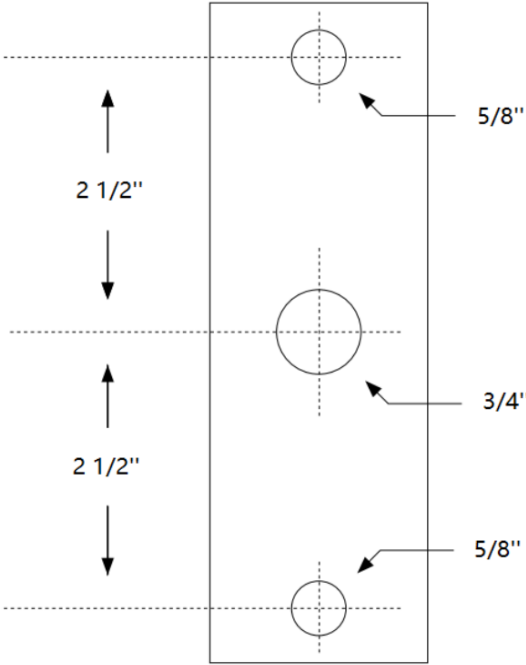

Drill Template

Contact us for photometric design:

